


Furnizor: **Sc Trivolt Distribution SRL**
Reg. com.: J23/3300/2016
CIF: RO36421140
Adresa: Strada Apusului nr 3 (primul
sens giratoriu Tehodor Pallady-
Autostrada Soarelui), Catelu, Ilfov
Banca: BRD
IBAN: RO34BRDE441SV13182234410

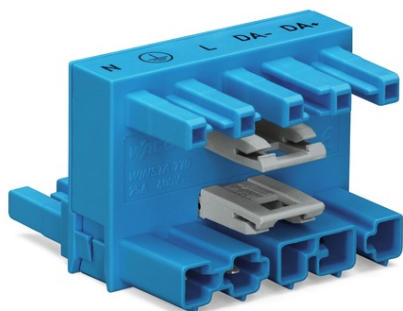

**WAGO H-DISTRIBUTION CONNECTOR; 5-POLE; COD. I; 1 INPUT; 2
OUTPUTS; OUTPUTS ON BOTH SIDES; 2 LOCKING LEVERS; BLUE**

Note on Contact Resistance: approx. 1 mΩ; contact resistance ≈ 0.25 mΩ;
contact transition plug/socket;
Ratings per: IEC/EN 60664-1;
Tensiune nominala (III/3): 400; V
Tensiune nominala de supratensiune (III/3): 6; kV
Curent nominal: 25; A
Legend (ratings): (III / 3) Overvoltage category III / Pollution degree 3;
Tensiune nominala UL 1977: 600; V
Curent nominal UL 1977: 23; A
Numar poli: 5;
Total number of potentials: 5;
Ground function: with preceding ground contact;
Distanta intre pini: 10 mm / 0.394 inch;
Latime: 50 mm / 1.969 inch;
Inaltime: 36,7 mm / 1.445 inch;
Adancime: 46 mm / 1.811 inch;
Technologie: DALI;
Coding: I;
Mating force of a plug-in connection: approx. 20 ... 70 N (depending on pole number);
Retention force of a plug-in connection: When locked: > 80 N;
Unmating force of a plug-in connection: when unlocked: approx. 20 ... 70 N (depending
on pole number);
Number of mating cycles: > 200, without resistive load 100, with resistive load IN = 25
A, tested (4 mm²/AWG 12);
Distributor type: h-distribution connector (bi-directional);
Marking: N L DA- DA+;
Protection type: IP20;
Note on protection type: Only when mated (these compact connectors are not designed
for use in open, easily accessible areas.);
Potential marking: N L DA- DA+;
Application: Lighting management;
Tip contact (pluggable connector): Socket/plug;
Mismating protection: Yes;
Locking of plug-in connection: locking lever;
Locking lever: yes;
Culoare: blue;
Material izolator: Polyamide 66 (PA 66);
Contact material: Copper or copper alloy (surface-treated);
Fire load: 0,625; MJ
Greutate: 38; g
Processing temperature: -5 ... +40 °C;
Continuous operating temperature: -35 ... +85 °C;
Note on continuous operating temperature: Insulating parts for temperatures ≤ 105 °C;
Product Group: 20 (WINSTA);
Tip ambalare: BOX;
Tara de origine: DE;
GTIN: 4045454706890;
Customs tariff number: 85366990990;
Pret: 67,43 lei (TVA inclus)

Detalii online: <https://www.materialelectrice.ro/h-distribution-connector-5-pole-cod-i-1-input-2-outputs-outputs-on-both-sides-2-locking-levers-blue-141245>