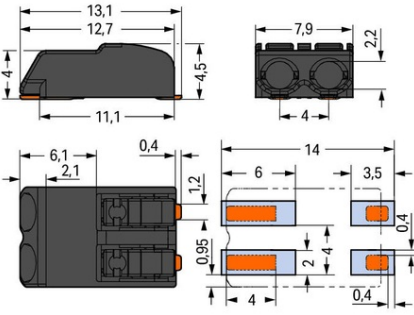


Furnizor: **Sc Trivolt Distribution SRL**
Reg. com.: J23/3300/2016
CIF: RO36421140
Adresa: Strada Apusului nr 3 (primul
sens giratoriu Tehodor Pallady-
Autostrada Soarelui), Catelu, Ilfov
Banca: BRD
IBAN: RO34BRDE441SV13182234410

 <p>Technical drawing of the WAGO SMD PCB Terminal Block. It includes a top view, a side view, and a detailed view of the terminal. Dimensions are provided in millimeters: overall length 13.1 mm, length to center of terminals 12.7 mm, terminal spacing 7.9 mm, terminal width 2.2 mm, terminal height 4.5 mm, terminal pitch 4 mm, terminal width 11.1 mm, terminal height 4 mm, terminal width 6.1 mm, terminal pitch 2.1 mm, terminal height 0.4 mm, terminal width 1.2 mm, terminal pitch 6 mm, terminal width 3.5 mm, terminal height 0.4 mm, terminal width 0.95 mm, terminal pitch 2 mm, terminal width 4 mm, terminal height 0.4 mm.</p>	<p>WAGO SMD PCB TERMINAL BLOCK; PUSH-BUTTON; 0.75 MM²; PIN SPACING 4 MM; 2-POLE; PUSH-IN CAGE CLAMP[®]; IN TAPE-AND-REEL PACKAGING; 0.75 MM²; BLACK</p> <p>Ratings per: IEC/EN 60664-1; Tensiune nominala (III/3): 63; V Tensiune nominala de supratensiune (III/3): 2,5; kV Tensiune nominala (III/2): 160; V Tensiune nominala de supratensiune (III/2): 2,5; kV Tensiune nominala (II/2): 320; V Tensiune nominala de supratensiune (II/2): 2,5; kV Curent nominal: 9; A Legend (ratings): (III / 2) $\hat{\%}$™ Overvoltage category III / Pollution degree 2; Certificari: UL 1059; Tensiune nominala UL 1977: 320; V Curent nominal UL 1977: 9; A Tehnologie conexiune: Push-in CAGE CLAMP[®]; Tip actionare: Push-button; Solid conductor: 0,2 ... 0,75 mm² / 24 ... 18 AWG; Fine-stranded conductor: 0,2 ... 0,75 mm² / 24 ... 18 AWG; Fine-stranded conductor; with insulated ferrule: 0,25 ... 0,34 mm²; Fine-stranded conductor; with uninsulated ferrule: 0,25 ... 0,34 mm²; Strip length: 7 ... 9 mm / 0.28 ... 0.35 inch; Conductor connection direction to PCB: 0; ° Numar poli: 2; Numar total de conexiuni: 2; Total number of potentials: 2; Numar tipuri de conexiuni: 1; Numar nivele: 1; Distanta intre pini: 4 mm / 0.157 inch; Latime: 7,9 mm / 0.311 inch; Inaltime: 4,5 mm / 0.177 inch; Adancime: 13,1 mm / 0.516 inch; Reel diameter of tape-and-reel packaging: 330; mm Tape Latime: 24; mm PCB contact: SMD; Culoare: black; Material group: I; Material izolator: Polyphthalamide (PPA GF); Flammability class per UL94: V0; Clamping spring material: Chrome nickel spring steel (CrNi); Contact material: Copper alloy; Contact plating: tin-plated; Fire load: 0,008; MJ Greutate: 0,5; g Temperatura lucru: -60 ... +105 °C; Tip ambalare: BOX; Tara de origine: CH; GTIN: 4055143251181; Customs tariff number: 85369010000; Pret: 3,17 lei (TVA inclus)</p> <p>Detalii online: https://www.materialelectrice.ro/smd-pcb-terminal-block-push-button-0-75-mm2-pin-spacing-4-mm-2-pole-push-in-cage-clamp-in-tape-and-reel-packaging-0-75-mm2-black-141433</p>
---	--