


Furnizor: **Sc Trivolt Distribution SRL**
Reg. com.: J23/3300/2016
CIF: RO36421140
Adresa: Strada Apusului nr 3 (primul
sens giratoriu Tehodor Pallady-
Autostrada Soarelui), Catelu, Ilfov
Banca: BRD
IBAN: RO34BRDE441SV13182234410

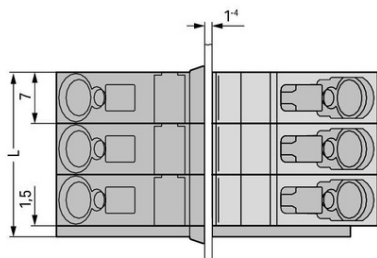

WAGO FEEDTHROUGH TERMINAL BLOCK; 4 MM²; PIN SPACING 7 MM; 3-POLE; CAGE CLAMP[®]; 4,00 MM²; GRAY

Ratings per: IEC/EN 60664-1;
Ratings (note): Suitable for neutral-grounded, three-phase, 4-wire systems rated at 400 V (conductor-to-conductor) per IEC/EN 60664-1.;
Tensiune nominala (III/3): 320; V
Tensiune nominala de supratensiune (III/3): 4; kV
Tensiune nominala (III/2): 320; V
Tensiune nominala de supratensiune (III/2): 4; kV
Tensiune nominala (II/2): 630; V
Tensiune nominala de supratensiune (II/2): 4; kV
Curent nominal: 32; A
Legend (ratings): (III / 2) $\hat{\%}$ ™ Overvoltage category III / Pollution degree 2;
Tensiune nominala UL (Use Group B): 300; V
Curent nominal UL (Use Group B): 20; A
Tensiune nominala UL (Use Group C): 150; V
Curent nominal UL (Use Group C): 20; A
Tensiune nominala UL (Use Group D): 300; V
Curent nominal UL (Use Group D): 10; A
Certificari: UL 1059;
Tensiune nominala CSA (Use Group B): 300; V
Curent nominal CSA (Use Group B): 20; A
Tensiune nominala CSA (Use Group C): 150; V
Curent nominal CSA (Use Group C): 20; A
Tensiune nominala CSA (Use Group D): 300; V
Curent nominal CSA (Use Group D): 10; A
Tehnologie conexiune: CAGE CLAMP[®];
Tip actionare: Operating tool;
Solid conductor: 0,08 ... 4 mm² / 28 ... 12 AWG;
Fine-stranded conductor: 0,08 ... 4 mm² / 28 ... 12 AWG;
Fine-stranded conductor; with insulated ferrule: 0,25 ... 2,5 mm²;
Fine-stranded conductor; with uninsulated ferrule: 0,25 ... 2,5 mm²;
Strip length: 9 ... 10 mm / 0.35 ... 0.39 inch;
Numar poli: 3;
Numar total de conexiuni: 6;
Total number of potentials: 3;
Numar tipuri de conexiuni: 2;
Numar nivele: 1;
Distanta intre pini: 7 mm / 0.276 inch;
Latime: 22,5 mm / 0.886 inch;
Inaltime: 23,55 mm / 0.927 inch;
Adancime: 42,5 mm / 1.673 inch;
Tip montaj: Locking claw;
Tip montaj: Feed-through mounting;
Culoare: gray;
Material group: I;
Material izolator: Polyamide 66 (PA 66);
Flammability class per UL94: V0;
Clamping spring material: Chrome nickel spring steel (CrNi);
Contact material: Cupru electrolitic (ECu);
Contact plating: tin-plated;
Fire load: 0,33; MJ
Greutate: 16,7; g
Temperatura lucru: -60 ... +105 °C;
Product Group: 4 (Printed Circuit);
Tip ambalare: BOX;
Tara de origine: DE;
GTIN: 4044918532709;
Customs tariff number: 85369010000;
Pret: 40,97 lei (TVA inclus)

Detalii online: <https://www.materialelectrice.ro/feedthrough-terminal-block-4-mm2-pin-spacing-7-mm-3-pole-cage-clamp-4-00-mm2-gray-141442>