


Furnizor: **Sc Trivolt Distribution SRL**  
Reg. com.: J23/3300/2016  
CIF: RO36421140  
Adresa: Strada Apusului nr 3 ( primul  
sens giratoriu Tehodor Pallady-  
Autostrada Soarelui), Catelu, Ilfov  
Banca: BRD  
IBAN: RO34BRDE441SV13182234410

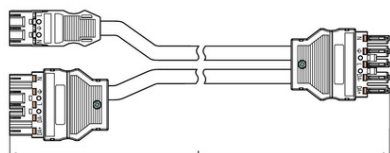

**WAGO PRE-ASSEMBLED Y-CABLE; CCA; 2 X PLUG/SOCKET; 3-POLE +  
5-POLE/5-POLE; COD. A/I; H05Z1Z1-F 2 X 1,50 MM<sup>2</sup>; H05Z1Z1-F 3G  
2.5 MM<sup>2</sup>; 0.5 M; 1,50 MM<sup>2</sup>; BLACK/BLUE**

Note on Contact Resistance: approx. 1 m $\Omega$ ; of contact resistance $\hat{e}$ © approx. 0.25 m $\Omega$ ;  
contact transition plug/socket;  
Ratings per: IEC/EN 60664-1;  
Tesiune nominala (III/3): 250; V  
Tensiune nominala de supratensiune (III/3): 4; kV  
Legend (ratings): (III / 3)  $\hat{a}$ %<sup>TM</sup> Overvoltage category III / Pollution degree 3;  
Tensiune nominala UL 1977: 600; V  
Curent nominal UL 1977: 23; A  
Numar poli: 3;  
Pole number 2: 5;  
Pole number 3: 5;  
Conductor preparation: tip-bonded;  
Sheathed cable diameter: 6,8 ... 8,6 mm;  
Sectiunea transversala a firului: 1,5; mm<sup>2</sup>  
Sectiunea transversala a firului (2): 2,5; mm<sup>2</sup>  
Connection type: MIDI plug; MIDI plug - MIDI socket;  
Durchmesser der Mantelleitung 2: 9,2 ... 11,4 mm;  
Distanța intre pini: 10 mm / 0.394 inch;  
Technologie: DALI;  
Coding: A;  
Mating force of a plug-in connection: approx. 20 ... 70 N (depending on pole number);  
Retention force of a plug-in connection: when locked: > 80N;  
Unmating force of a plug-in connection: when unlocked: approx. 20 ... 70 N (depending  
on pole number);  
Number of mating cycles: 200 (without resistive load) 100 (with resistive load IN = 25  
A), tested (4 mm<sup>2</sup>);  
Connection type: MIDI plug; MIDI plug - MIDI socket;  
Type of pre-assembled cable: Y-cable;  
Cable type: H05Z1Z1-F 2x1.5;  
Protection type: IP20;  
Note on protection type: Only when mated (these compact connectors are not designed  
for use in open, easily accessible areas.);  
Application: General mains applications;  
Mismating protection: Yes;  
Locking of plug-in connection: locking lever;  
Locking lever: retrofittable;  
Culoare: black/blue;  
Material izolator: Polyamide 66 (PA 66);  
Fire class per EN 50575: Cca;  
Contact material: Copper or copper alloy (surface-treated);  
Greutate: 182,7; g  
Processing temperature: -5 ... +40 °C;  
Continuous operating temperature: -35 ... +85 °C;  
Note on continuous operating temperature: PVC cable for temperatures  $\leq$  70 °C  
(including halogen-free) Insulating parts for temperatures  $\leq$  105 °C;  
Tip ambalare: not packed;  
Tara de origine: DE;  
GTIN: 4055143812023;  
Customs tariff number: 85444290900;  
Pret: 165,72 lei (TVA inclus)

Detalii online: <https://www.materialeelectrice.ro/pre-assembled-y-cable-cca-2-x-plug-socket-3-pole-5-pole-5-pole-cod-a-i-h05z1z1-f-2-x-1-50-mm2-h05z1z1-f-3g-2-5-mm2-0-5-m-1-50-mm2-black-blue-141488>