


Furnizor: **Sc Trivolt Distribution SRL**
Reg. com.: J23/3300/2016
CIF: RO36421140
Adresa: Strada Apusului nr 3 (primul
sens giratoriu Tehodor Pallady-
Autostrada Soarelui), Catelu, Ilfov
Banca: BRD
IBAN: RO34BRDE441SV13182234410

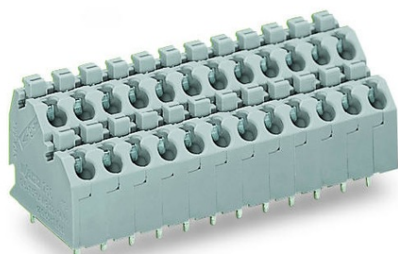

**WAGO DOUBLE-DECK PCB TERMINAL BLOCK; PUSH-BUTTON; 1.5
MM²; PIN SPACING 5 MM; 2 X 10-POLE; PUSH-IN CAGE CLAMP®;
1,50 MM²; AGATE GRAY**

Ratings per: IEC/EN 60664-1;
Tensiune nominala (III/3): 320; V
Tensiune nominala de supratensiune (III/3): 4; kV
Tensiune nominala (III/2): 320; V
Tensiune nominala de supratensiune (III/2): 4; kV
Tensiune nominala (II/2): 630; V
Tensiune nominala de supratensiune (II/2): 4; kV
Curent nominal: 10; A
Legend (ratings): (III / 2) $\hat{=}$ Overvoltage category III / Pollution degree 2;
Tensiune nominala UL (Use Group B): 300; V
Curent nominal UL (Use Group B): 10; A
Tensiune nominala UL (Use Group D): 300; V
Curent nominal UL (Use Group D): 10; A
Certificari: UL 1059;
Tensiune nominala CSA (Use Group B): 300; V
Curent nominal CSA (Use Group B): 10; A
Tensiune nominala CSA (Use Group D): 300; V
Curent nominal CSA (Use Group D): 10; A
Tehnologie conexiune: Push-in CAGE CLAMP®;
Tip actionare: Push-button;
Solid conductor: 0.5 ... 1.5 mm² / 20 ... 16 AWG;
Fine-stranded conductor: 0.75 ... 1.5 mm²;
Fine-stranded conductor; with insulated ferrule: 0.5 ... 1 mm²;
Fine-stranded conductor; with uninsulated ferrule: 0.5 ... 1 mm²;
Strip length: 9 ... 10 mm / 0.35 ... 0.39 inch;
Conductor connection direction to PCB: 45; °
Numar poli: 10;
Numar total de conexiuni: 20;
Total number of potentials: 20;
Numar tipuri de conexiuni: 1;
Numar nivele: 2;
Distanta intre pini: 5 mm / 0.197 inch;
Latime: 51.2 mm / 2.016 inch;
Inaltime: 24.9 mm / 0.98 inch;
Inaltime de la fata: 20.9 mm / 0.823 inch;
Adancime: 21.7 mm / 0.854 inch;
Lungimea pinului de contact: 4; mm
Solder pin dimensions: 0.5 x 0.75 mm;
Diametrul de gaurire cu toleranta: 1.2 (-0.1 ... +0.1) mm;
PCB contact: THT;
Solder pin arrangement: over the entire terminal strip, in line;
Number of solder pins per potential: 1;
Culoare: agate gray;
Material izolator: Polyamide 66 (PA 66);
Flammability class per UL94: V0;
Clamping spring material: Chrome nickel spring steel (CrNi);
Contact material: Cupru electrolitic (ECu);
Contact plating: tin-plated;
Fire load: 0,407; MJ
Greutate: 19,2; g
Product Group: 4 (Printed Circuit);
Tip ambalare: BOX;
Tara de origine: CH;
GTIN: 4044918300988;
Customs tariff number: 85369010000;
Pret: 40,26 lei (TVA inclus)

Detalii online: <https://www.materialelectrice.ro/double-deck-pcb-terminal-block-push-button-1-5-mm2-pin-spacing-5-mm-2-x-10-pole-push-in-cage-clamp-1-50-mm2-agate-gray-141565>