


Furnizor: **Sc Trivolt Distribution SRL**  
 Reg. com.: J23/3300/2016  
 CIF: RO36421140  
 Adresa: Strada Apusului nr 3 ( primul  
 sens giratoriu Tehodor Pallady-  
 Autostrada Soarelui), Catelu, Ilfov  
 Banca: BRD  
 IBAN: RO34BRDE441SV13182234410

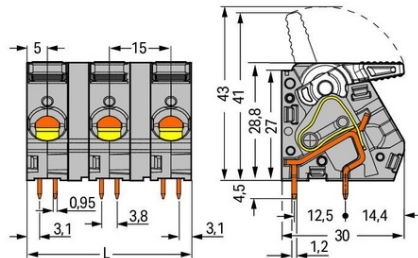

**WAGO PCB TERMINAL BLOCK; LEVER; 16 MM<sup>2</sup>; PIN SPACING 15 MM; 2-POLE; CAGE CLAMP<sup>®</sup>; 16,00 MM<sup>2</sup>; GRAY**

Ratings per: IEC/EN 60664-1;  
 Tensiune nominala (III/3): 800; V  
 Tensiune nominala de supratensiune (III/3): 8; kV  
 Tensiune nominala (III/2): 1000; V  
 Tensiune nominala de supratensiune (III/2): 8; kV  
 Tensiune nominala (II/2): 1000; V  
 Tensiune nominala de supratensiune (II/2): 8; kV  
 Curent nominal: 76; A  
 Legend (ratings): (III / 2) <sup>â%</sup>™ Overvoltage category III / Pollution degree 2;  
 Tensiune nominala UL (Use Group B): 600; V  
 Curent nominal UL (Use Group B): 65; A  
 Tensiune nominala UL (Use Group C): 600; V  
 Curent nominal UL (Use Group C): 65; A  
 Certificari: UL 1059;  
 Tehnologie conexiune: CAGE CLAMP<sup>®</sup>;  
 Tip actionare: Lever;  
 Solid conductor: 1,5 ... 16 mm<sup>2</sup> / 16 ... 6 AWG;  
 Fine-stranded conductor: 1,5 ... 16 mm<sup>2</sup> / 16 ... 6 AWG;  
 Fine-stranded conductor; with insulated ferrule: 1,5 ... 10 mm<sup>2</sup>;  
 Fine-stranded conductor; with uninsulated ferrule: 1,5 ... 10 mm<sup>2</sup>;  
 Strip length: 12 ... 13 mm / 0.47 ... 0.51 inch;  
 Conductor connection direction to PCB: 30; °  
 Numar poli: 2;  
 Numar total de conexiuni: 2;  
 Total number of potentials: 2;  
 Numar tipuri de conexiuni: 1;  
 Numar nivele: 1;  
 Distanta intre pini: 15 mm / 0.591 inch;  
 Latime: 26,5 mm / 1.043 inch;  
 Inaltime: 33,3 mm / 1.311 inch;  
 Inaltime de la fata: 28,8 mm / 1.134 inch;  
 Adancime: 30 mm / 1.181 inch;  
 Lungimea pinului de contact: 4,5; mm  
 Solder pin dimensions: 0,95 x 1,2 mm;  
 Diametrul de gaurire cu toleranta: 1,6 (+0,1) mm;  
 PCB contact: THT;  
 Solder pin arrangement: over the entire terminal strip (in-line);  
 Number of solder pins per potential: 4;  
 Culoare: gray;  
 Material group: I;  
 Material izolator: Polyamide 66 (PA 66);  
 Flammability class per UL94: V0;  
 Clamping spring material: Chrome nickel spring steel (CrNi);  
 Contact material: Cupru electrolitic(ECu);  
 Contact plating: tin-plated;  
 Fire load: 0,365; MJ  
 Greutate: 20; g  
 Temperatura lucru: -60 ... +105 °C;  
 Product Group: 4 (Printed Circuit);  
 Tip ambalare: BOX;  
 Tara de origine: PL;  
 GTIN: 4045454739416;  
 Customs tariff number: 85369010000;  
 Pret: 17,85 lei (TVA inclus)

Detalii online: <https://www.materialelectrice.ro/pcb-terminal-block-lever-16-mm2-pin-spacing-15-mm-2-pole-cage-clamp-16-00-mm2-gray-141607>