


Furnizor: **Sc Trivolt Distribution SRL**  
Reg. com.: J23/3300/2016  
CIF: RO36421140  
Adresa: Strada Apusului nr 3 ( primul  
sens giratoriu Tehodor Pallady-  
Autostrada Soarelui), Catelu, Ilfov  
Banca: BRD  
IBAN: RO34BRDE441SV13182234410

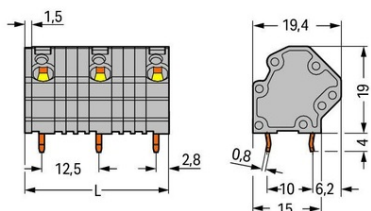

**WAGO PCB TERMINAL BLOCK; 4 MM<sup>2</sup>; PIN SPACING 12.5 MM; 3-  
POLE; CAGE CLAMP<sup>®</sup>; 4,00 MM<sup>2</sup>; GRAY**

Ratings per: IEC/EN 60664-1;  
Tensiune nominala (III/3): 1000; V  
Tensiune nominala de supratensiune (III/3): 8; kV  
Tensiune nominala (III/2): 1000; V  
Tensiune nominala de supratensiune (III/2): 8; kV  
Tensiune nominala (II/2): 1000; V  
Tensiune nominala de supratensiune (II/2): 8; kV  
Curent nominal: 32; A  
Legend (ratings): (III / 2)  $\hat{a}$ %<sup>TM</sup> Overvoltage category III / Pollution degree 2;  
Tensiune nominala UL (Use Group B): 600; V  
Curent nominal UL (Use Group B): 20; A  
Tensiune nominala UL (Use Group C): 600; V  
Curent nominal UL (Use Group C): 20; A  
Certificari: UL 1059;  
Tensiune nominala CSA (Use Group B): 600; V  
Curent nominal CSA (Use Group B): 20; A  
Tensiune nominala CSA (Use Group C): 600; V  
Curent nominal CSA (Use Group C): 20; A  
Tehnologie conexiune: CAGE CLAMP<sup>®</sup>;  
Tip actionare: Operating tool;  
Solid conductor: 0,08 ... 4 mm<sup>2</sup> / 28 ... 12 AWG;  
Fine-stranded conductor: 0,08 ... 4 mm<sup>2</sup> / 28 ... 12 AWG;  
Fine-stranded conductor; with insulated ferrule: 0,25 ... 2,5 mm<sup>2</sup>;  
Fine-stranded conductor; with uninsulated ferrule: 0,25 ... 2,5 mm<sup>2</sup>;  
Strip length: 8 ... 9 mm / 0.31 ... 0.35 inch;  
Conductor connection direction to PCB: 45; °  
Numar poli: 3;  
Numar total de conexiuni: 3;  
Total number of potentials: 3;  
Numar tipuri de conexiuni: 1;  
Numar nivele: 1;  
Distanta intre pini: 12,5 mm / 0.492 inch;  
Latime: 31,5 mm / 1.24 inch;  
Inaltime: 23 mm / 0.906 inch;  
Inaltime de la fata: 19 mm / 0.748 inch;  
Adancime: 19,4 mm / 0.764 inch;  
Lungimea pinului de contact: 4; mm  
Solder pin dimensions: 0,8 x 1,2 mm;  
Diametrul de gaurire cu toleranta: 1,5 (+0,1) mm;  
PCB contact: THT;  
Solder pin arrangement: over the entire terminal strip (in-line);  
Number of solder pins per potential: 2;  
Culoare: gray;  
Material group: I;  
Material izolator: Polyamide 66 (PA 66);  
Flammability class per UL94: V0;  
Clamping spring material: Chrome nickel spring steel (CrNi);  
Contact material: Cupru electrolitic (ECu);  
Contact plating: tin-plated;  
Fire load: 0,172; MJ  
Greutate: 8,5; g  
Temperatura lucru: -60 ... +105 °C;  
Product Group: 4 (Printed Circuit);  
Tip ambalare: BOX;  
Tara de origine: PL;  
GTIN: 4045454001087;  
Customs tariff number: 85369010000;  
Pret: 12,11 lei (TVA inclus)

Detalii online: <https://www.materialelectrice.ro/pcb-terminal-block-4-mm2-pin-spacing-12-5-mm-3-pole-cage-clamp-4-00-mm2-gray-141622>