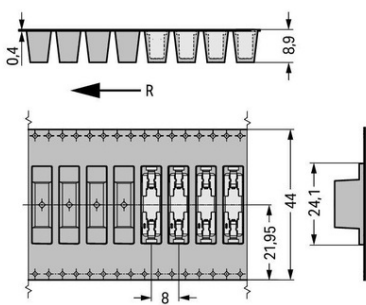


Furnizor: **Sc Trivolt Distribution SRL**
Reg. com.: J23/3300/2016
CIF: RO36421140
Adresa: Strada Apusului nr 3 (primul
sens giratoriu Tehodor Pallady-
Autostrada Soarelui), Catelu, Ilfov
Banca: BRD
IBAN: RO34BRDE441SV13182234410

	<p><u>WAGO THROUGH-BOARD SMD PCB TERMINAL BLOCK; 0.75 MM²; PIN SPACING 6.5 MM; 1-POLE; PUSH-IN CAGE CLAMP[®]; IN TAPE-AND-REEL PACKAGING; 0,75 MM²; WHITE</u></p> <p>Ratings per: IEC/EN 60664-1; Ratings (note): Electrical data for FR4 PCB type; Tensiune nominala (III/3): 320; V Tensiune nominala de supratensiune (III/3): 4; kV Tensiune nominala (III/2): 320; V Tensiune nominala de supratensiune (III/2): 4; kV Tensiune nominala (II/2): 630; V Tensiune nominala de supratensiune (II/2): 4; kV Curent nominal: 9; A Ratings per: IEC/EN 60664-1; Ratings (note) 2: Electrical data for metal-core PCBs; Tensiune nominala (III/3) 2: 200; V Tensiune nominala de supratensiune (III/3) 2: 4; kV Tensiune nominala (III/2) 2: 320; V Tensiune nominala de supratensiune (III/2) 2: 4; kV Tensiune nominala (II/2) 2: 500; V Tensiune nominala de supratensiune (II/2) 2: 4; kV Curent nominal 2: 9; A Legend (ratings): (III / 2) %[™] Overvoltage category III / Pollution degree 2; Certificari: UL 1059; Tensiune nominala UL 1977: 600; V Curent nominal UL 1977: 9; A Tehnologie conexiune: Push-in CAGE CLAMP[®]; Tip actionare: Operating tool; Solid conductor: 0,2 ... 0,75 mm² / 24 ... 18 AWG; Fine-stranded conductor: 0,2 ... 0,75 mm² / 24 ... 18 AWG; Strip length: 8 ... 10 mm / 0.31 ... 0.39 inch; Conductor connection direction to PCB: 0; ° Numar poli: 1; Numar total de conexiuni: 1; Total number of potentials: 1; Numar tipuri de conexiuni: 1; Numar nivele: 1; Distanta intre pini: 6,5 mm / 0.256 inch; Latime: 5,3 mm / 0.209 inch; Inaltime: 7,45 mm / 0.293 inch; Adancime: 22,2 mm / 0.874 inch; Reel diameter of tape-and-reel packaging: 330; mm Tape Latime: 44; mm Design: with Cover; Tip montaj: Through-board; Marking: -; PCB contact: SMD; Culoare: white; Material group: I; Material izolator: Polyphthalamide (PPA GF); Flammability class per UL94: V0; Clamping spring material: Chrome nickel spring steel (CrNi); Contact material: Copper alloy; Contact plating: tin-plated; Greutate: 0,6; g Temperatura lucru: -60 ... +105 °C; Tip ambalare: BOX; Tara de origine: CH; GTIN: 4055143645126; Customs tariff number: 85369010000; Pret: 2,33 lei (TVA inclus)</p> <p>Detalii online: https://www.materialeelectric.ro/through-board-smd-pcb-terminal-block-0-75-mm2-pin-spacing-6-5-mm-1-pole-push-in-cage-clamp-in-tape-and-reel-packaging-0-75-mm2-white-141684</p>
---	--