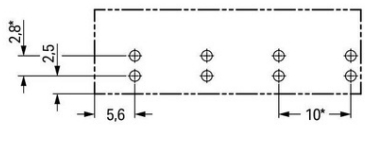


Furnizor: **Sc Trivolt Distribution SRL**  
 Reg. com.: J23/3300/2016  
 CIF: RO36421140  
 Adresa: Strada Apusului nr 3 ( primul  
 sens giratoriu Tehodor Pallady-  
 Autostrada Soarelui), Catelu, Ilfov  
 Banca: BRD  
 IBAN: RO34BRDE441SV13182234410

 <p>* ± 0.05 mm          Drilled hole diameter: 1.5<sup>+0.1</sup> mm</p>	<p align="center"><b>WAGO PLUG FOR PCBs; STRAIGHT; 4-POLE; COD. A; WHITE</b></p> <p>Note on Contact Resistance: approx. 1 mΩ, of contact resistance © approx. 0.25 mΩ, contact transition plug/socket;          Ratings per: IEC/EN 60664-1;          Tensiune nominala (III/3): 400; V          Tensiune nominala de supratensiune (III/3): 6; kV          Curent nominal: 25; A          Legend (ratings): (III / 3) %™ Overvoltage category III / Pollution degree 3;          Tensiune nominala UL 1977: 600; V          Curent nominal UL 1977: 23; A          Numar poli: 4;          Total number of potentials: 4;          Numar nivele: 1;          Ground function: with preceding ground contact;          Distanta intre pini: 10 mm / 0.394 inch;          Latime: 37 mm / 1.457 inch;          Inaltime: 29,5 mm / 1.161 inch;          Inaltime de la fata: 26 mm / 1.024 inch;          Adancime: 14,6 mm / 0.575 inch;          Lungimea pinului de contact: 3,5; mm          Solder pin dimensions: 1 x 0,8 mm;          Diametrul de gaurire cu toleranta: 1,5 (-0,1 ... +0,1) mm;          Coding: A;          Mating force of a plug-in connection: approx. 20 ... 70 N (depending on pole number);          Retention force of a plug-in connection: Locked: &gt; 80 N;          Unmating force of a plug-in connection: Unlocked: approx. 20 ... 70 N (depending on pole number);          Number of mating cycles: &gt;200, without resistive load 100, with resistive load IN = 25 A, tested (4 mm²/AWG 12);          Design: straight;          Marking: N 2/L 1/L';          Potential marking: N 2/L 1/L';          Application: General mains applications;          Tip contact (pluggable connector): Conector tata/fisa;          Connector (connection type): for PCB;          Mismatching protection: Yes;          Mating direction to the PCB: 90; °          Locking of plug-in connection: locking lever;          Locking lever: yes;          PCB contact: THT;          Solder pin arrangement: 2 in-line solder pins/pole;          Number of solder pins per potential: 2;          Culoare: white;          Material izolator: Polyamide 66 (PA 66);          Clamping spring material: Chrome nickel spring steel (CrNi);          Contact material: Copper or copper alloy (surface-treated);          Fire load: 0,277; MJ          Greutate: 11,7; g          Processing temperature: -5 ... +40 °C;          Continuous operating temperature: -35 ... +85 °C;          Note on continuous operating temperature: Insulating parts for temperatures ≤ 105 °C;          Product Group: 20 (WINSTA);          Tip ambalare: BOX;          Tara de origine: PL;          GTIN: 4044918511568;          Customs tariff number: 85366990990;          Pret: 9,79 lei (TVA inclus)</p> <p>Detalii online: <a href="https://www.materialelectrice.ro/plug-for-pcb-s-straight-4-pole-cod-a-white-141813">https://www.materialelectrice.ro/plug-for-pcb-s-straight-4-pole-cod-a-white-141813</a></p>
--	--