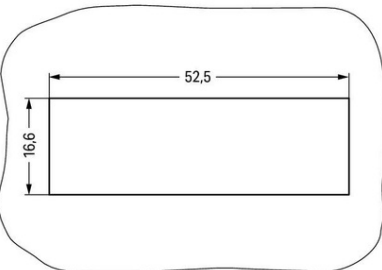


Furnizor: **Sc Trivolt Distribution SRL**  
 Reg. com.: J23/3300/2016  
 CIF: RO36421140  
 Adresa: Strada Apusului nr 3 ( primul  
 sens giratoriu Tehodor Pallady-  
 Autostrada Soarelui), Catelu, Ilfov  
 Banca: BRD  
 IBAN: RO34BRDE441SV13182234410

 <p>Plate thickness: 0.5 ... 2 mm          Cutout tolerance: + 0.1 mm</p>	<p align="center"><b>WAGO SNAP-IN PLUG; 5-POLE; COD. B; 4,00 MM<sup>2</sup>; GRAY</b></p> <p>Note on Contact Resistance: approx. 1 mΩ; of contact resistance © approx. 0.25 mΩ; contact transition plug/socket;          Ratings per: IEC/EN 60664-1;          Tensiune nominala (III/3): 400; V          Tensiune nominala de supratensiune (III/3): 6; kV          Curent nominal: 25; A          Legend (ratings): (III / 3) %™ Overvoltage category III / Pollution degree 3;          Tensiune nominala UL 1977: 600; V          Curent nominal UL 1977: 23; A          Tehnologie conexiune: Push-in CAGE CLAMP®;          Tip actionare: Operating tool; Push-in;          Nominal cross-section: 4 mm<sup>2</sup>;          Solid conductor: 0,5 ... 4 mm<sup>2</sup> / 20 ... 12 AWG;          Solid conductor; push-in termination: 1,5 ... 4 mm<sup>2</sup> / 16 ... 12 AWG;          Stranded conductor: 0,5 ... 2,5 mm<sup>2</sup> / 20 ... 14 AWG;          Fine-stranded conductor: 0,5 ... 4 mm<sup>2</sup> / 20 ... 12 AWG;          Fine-stranded conductor; with insulated ferrule: 0,25 ... 1,5 mm<sup>2</sup> / 20 ... 16 AWG;          Fine-stranded conductor; with uninsulated ferrule: 0,25 ... 2,5 mm<sup>2</sup> / 20 ... 14 AWG;          Fine-stranded conductor; with ferrule; push-in termination: 1,5 mm<sup>2</sup> / 16 AWG;          Strip length: 9 mm / 0.35 inch;          Note (strip length): see also packaging or instructions;          Numar poli: 5;          Numar total de conexiuni: 10;          Total number of potentials: 5;          Conductor entry direction to mating direction: 0; °          Distanta intre pini: 10 mm / 0.394 inch;          Latime: 55,5 mm / 2.185 inch;          Inaltime: 18,5 mm / 0.728 inch;          Adancime: 36 mm / 1.417 inch;          Coding: B;          Mating force of a plug-in connection: approx. 20 ... 70 N (depending on pole number);          Retention force of a plug-in connection: Locked: &gt; 80 N;          Unmating force of a plug-in connection: Unlocked: approx. 20 ... 70 N (depending on pole number);          Number of mating cycles: &gt;200, without resistive load 100, with resistive load IN = 25 A, tested (4 mm<sup>2</sup>/AWG 12);          Housing sheet thickness: 0,5 ... 2 mm / 0.02 ... 0.079 inch;          Tip montaj: Snap-in;          Marking: N PE 3 2 1;          Protection type: IP20;          Note on protection type: Only when mated (these compact connectors are not designed for use in open, easily accessible areas).;          Potential marking: N PE 3 2 1;          Tip contact (pluggable connector): Conector tata/fisa;          Connector (connection type): for conductor;          Mismatching protection: Yes;          Locking of plug-in connection: locking lever;          Locking lever: yes;          Culoare: gray;          Material izolator: Polyamide 66 (PA 66);          Clamping spring material: Chrome nickel spring steel (CrNi);          Contact material: Copper or copper alloy (surface-treated);          Fire load: 0,364; MJ          Greutate: 18; g          Processing temperature: -5 ... +40 °C;          Continuous operating temperature: -35 ... +85 °C;          Note on continuous operating temperature: Insulating parts for temperatures ≤ 105 °C;          Tip ambalare: BOX;          Tara de origine: DE;          GTIN: 4055143594318;          Customs tariff number: 85366990990;          Pret: 21,97 lei (TVA inclus)</p> <p>Detalii online: <a href="https://www.materialelectrice.ro/snap-in-plug-5-pole-cod-b-4-00-mm2-gray-141852">https://www.materialelectrice.ro/snap-in-plug-5-pole-cod-b-4-00-mm2-gray-141852</a></p>
--	---