


Furnizor: **Sc Trivolt Distribution SRL**
Reg. com.: J23/3300/2016
CIF: RO36421140
Adresa: Strada Apusului nr 3 (primul
sens giratoriu Tehodor Pallady-
Autostrada Soarelui), Catelu, Ilfov
Banca: BRD
IBAN: RO34BRDE441SV13182234410

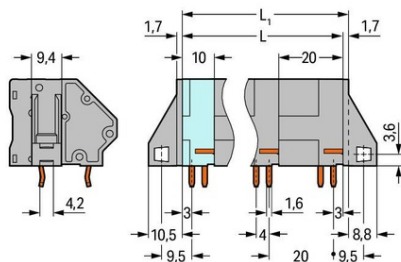

**WAGO PCB TERMINAL BLOCK; 16 MM²; PIN SPACING 20 MM; 2-
POLE; CAGE CLAMP®; COMMONING OPTION; 16,00 MM²; GRAY**

Ratings per: IEC/EN 60664-1;
Tensiune nominala (III/3): 1000; V
Tensiune nominala de supratensiune (III/3): 12; kV
Tensiune nominala (III/2): 1000; V
Tensiune nominala de supratensiune (III/2): 12; kV
Tensiune nominala (II/2): 1000; V
Tensiune nominala de supratensiune (II/2): 12; kV
Curent nominal: 76; A
Legend (ratings): (III / 2) %™ Overvoltage category III / Pollution degree 2;
Tensiune nominala UL (Use Group B): 600; V
Curent nominal UL (Use Group B): 65; A
Tensiune nominala UL (Use Group C): 600; V
Curent nominal UL (Use Group C): 65; A
Certificari: UL 1059;
Tensiune nominala CSA (Use Group B): 600; V
Curent nominal CSA (Use Group B): 65; A
Tensiune nominala CSA (Use Group C): 600; V
Curent nominal CSA (Use Group C): 65; A
Tehnologie conexiune: CAGE CLAMP®;
Tip actionare: Operating tool;
Solid conductor: 0,2 ... 16 mm² / 24 ... 6 AWG;
Fine-stranded conductor: 0,2 ... 16 mm² / 24 ... 6 AWG;
Fine-stranded conductor; with insulated ferrule: 0,25 ... 10 mm²;
Fine-stranded conductor; with uninsulated ferrule: 0,25 ... 10 mm²;
Strip length: 12 ... 13 mm / 0.47 ... 0.51 inch;
Conductor connection direction to PCB: 45; °
Numar poli: 2;
Numar total de conexiuni: 2;
Total number of potentials: 2;
Numar tipuri de conexiuni: 1;
Numar nivele: 1;
Number of jumper slots: 1;
Distanta intre pini: 20 mm / 0.787 inch;
Latime: 41 mm / 1.614 inch;
Inaltime: 33,5 mm / 1.319 inch;
Inaltime de la fata: 27 mm / 1.063 inch;
Adancime: 33,4 mm / 1.315 inch;
Lungimea pinului de contact: 6,5; mm
Solder pin dimensions: 1,2 x 1,6 mm;
Diametrul de gaurire cu toleranta: 2,2 (+0,1) mm;
Tip montaj: Mounting flange;
Tip montaj: Panel mounting;
PCB contact: THT;
Solder pin arrangement: over the entire terminal strip (in-line);
Number of solder pins per potential: 4;
Culoare: gray;
Material group: I;
Material izolator: Polyamide 66 (PA 66);
Flammability class per UL94: V0;
Clamping spring material: Chrome nickel spring steel (CrNi);
Contact material: Cupru electrolitic (ECu);
Contact plating: tin-plated;
Fire load: 0,472; MJ
Greutate: 25,2; g
Temperatura lucru: -60 ... +105 °C;
Product Group: 4 (Printed Circuit);
Tip ambalare: BOX;
Tara de origine: PL;
GTIN: 4044918303057;
Customs tariff number: 85369010000;
Pret: 17,54 lei (TVA inclus)

Detalii online: <https://www.materialelectrice.ro/pcb-terminal-block-16-mm2-pin-spacing-20-mm-2-pole-cage-clamp-commoning-option-16-00-mm2-gray-142043>