


Furnizor: **Sc Trivolt Distribution SRL**
 Reg. com.: J23/3300/2016
 CIF: RO36421140
 Adresa: Strada Apusului nr 3 (primul
 sens giratoriu Tehodor Pallady-
 Autostrada Soarelui), Catelu, Ilfov
 Banca: BRD
 IBAN: RO34BRDE441SV13182234410

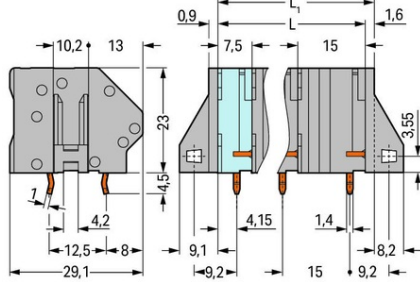

**WAGO PCB TERMINAL BLOCK; 6 MM²; PIN SPACING 15 MM; 10-
 POLE; CAGE CLAMP®; COMMONING OPTION; 6,00 MM²; GRAY**

Ratings per: IEC/EN 60664-1;
 Tensiune nominala (III/3): 1000; V
 Tensiune nominala de supratensiune (III/3): 8; kV
 Tensiune nominala (III/2): 1000; V
 Tensiune nominala de supratensiune (III/2): 8; kV
 Tensiune nominala (II/2): 1000; V
 Tensiune nominala de supratensiune (II/2): 8; kV
 Curent nominal: 41; A
 Legend (ratings): (III / 2) â‰‰™ Overvoltage category III / Pollution degree 2;
 Tensiune nominala UL (Use Group B): 600; V
 Curent nominal UL (Use Group B): 30; A
 Tensiune nominala UL (Use Group C): 600; V
 Curent nominal UL (Use Group C): 30; A
 Certificari: UL 1059;
 Tensiune nominala CSA (Use Group B): 600; V
 Curent nominal CSA (Use Group B): 30; A
 Tensiune nominala CSA (Use Group C): 600; V
 Curent nominal CSA (Use Group C): 30; A
 Tehnologie conexiune: CAGE CLAMP®;
 Tip actionare: Operating tool;
 Solid conductor: 0,2 ... 6 mm² / 24 ... 10 AWG;
 Fine-stranded conductor: 0,2 ... 6 mm² / 24 ... 10 AWG;
 Fine-stranded conductor; with insulated ferrule: 0,25 ... 4 mm²;
 Fine-stranded conductor; with uninsulated ferrule: 0,25 ... 4 mm²;
 Strip length: 11 ... 12 mm / 0.43 ... 0.47 inch;
 Conductor connection direction to PCB: 45; °
 Numar poli: 10;
 Numar total de conexiuni: 10;
 Total number of potentials: 10;
 Numar tipuri de conexiuni: 1;
 Numar nivele: 1;
 Distanta intre pini: 15 mm / 0.591 inch;
 Latime: 144,1 mm / 5.673 inch;
 Inaltime: 27,5 mm / 1.083 inch;
 Inaltime de la fata: 23 mm / 0.906 inch;
 Adancime: 29,1 mm / 1.146 inch;
 Lungimea pinului de contact: 4,5; mm
 Solder pin dimensions: 1 x 1,4 mm;
 Diametrul de gaurire cu toleranta: 1,8 (+0,1) mm;
 PCB contact: THT;
 Solder pin arrangement: over the entire terminal strip (in-line);
 Number of solder pins per potential: 4;
 Culoare: gray;
 Material group: I;
 Material izolator: Polyamide 66 (PA 66);
 Flammability class per UL94: V0;
 Clamping spring material: Chrome nickel spring steel (CrNi);
 Contact material: Cupru electrolitic(ECu);
 Contact plating: tin-plated;
 Fire load: 1,48; MJ
 Greutate: 72,5; g
 Temperatura lucru: -60 ... +105 °C;
 Product Group: 4 (Printed Circuit);
 Tip ambalare: BOX;
 Tara de origine: PL;
 GTIN: 4045454625788;
 Customs tariff number: 85369010000;
 Pret: 65,62 lei (TVA inclus)

Detalii online: <https://www.materialelectrice.ro/pcb-terminal-block-6-mm2-pin-spacing-15-mm-10-pole-cage-clamp-commoning-option-6-00-mm2-gray-142117>