


Furnizor: **Sc Trivolt Distribution SRL**  
Reg. com.: J23/3300/2016  
CIF: RO36421140  
Adresa: Strada Apusului nr 3 ( primul  
sens giratoriu Tehodor Pallady-  
Autostrada Soarelui), Catelu, Ilfov  
Banca: BRD  
IBAN: RO34BRDE441SV13182234410

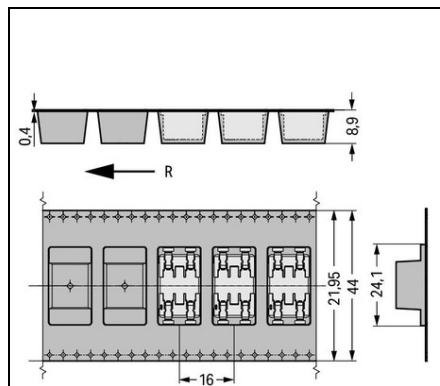

**WAGO THROUGH-BOARD SMD PCB TERMINAL BLOCK; 0.75 MM<sup>2</sup>;  
PIN SPACING 6.5 MM; 2-POLE; PUSH-IN CAGE CLAMP<sup>®</sup>; IN TAPE-  
AND-REEL PACKAGING; 0,75 MM<sup>2</sup>; WHITE**

Ratings per: IEC/EN 60664-1;  
Ratings (note): Electrical data for FR4 PCB type;  
Tensiune nominala (III/3): 320; V  
Tensiune nominala de supratensiune (III/3): 4; kV  
Tensiune nominala (III/2): 320; V  
Tensiune nominala de supratensiune (III/2): 4; kV  
Tensiune nominala (II/2): 630; V  
Tensiune nominala de supratensiune (II/2): 4; kV  
Curent nominal: 9; A  
Ratings per: IEC/EN 60664-1;  
Ratings (note) 2: Electrical data for metal-core PCBs;  
Tensiune nominala (III/3) 2: 200; V  
Tensiune nominala de supratensiune (III/3) 2: 4; kV  
Tensiune nominala (III/2) 2: 320; V  
Tensiune nominala de supratensiune (III/2) 2: 4; kV  
Tensiune nominala (II/2) 2: 500; V  
Tensiune nominala de supratensiune (II/2) 2: 4; kV  
Curent nominal 2: 9; A  
Legend (ratings): (III / 2)  $\hat{a}\%$ ™ Overvoltage category III / Pollution degree 2;  
Certificari: UL 1059;  
Tensiune nominala UL 1977: 600; V  
Curent nominal UL 1977: 9; A  
Tehnologie conexiune: Push-in CAGE CLAMP<sup>®</sup>;  
Tip actionare: Operating tool;  
Solid conductor: 0,2 ... 0,75 mm<sup>2</sup> / 24 ... 18 AWG;  
Fine-stranded conductor: 0,2 ... 0,75 mm<sup>2</sup> / 24 ... 18 AWG;  
Strip length: 8 ... 10 mm / 0.31 ... 0.39 inch;  
Conductor connection direction to PCB: 0; °  
Numar poli: 2;  
Numar total de conexiuni: 2;  
Total number of potentials: 2;  
Numar tipuri de conexiuni: 1;  
Numar nivele: 1;  
Distanta intre pini: 6,5 mm / 0.256 inch;  
Latime: 11,8 mm / 0.465 inch;  
Inaltime: 7,45 mm / 0.293 inch;  
Adancime: 22,2 mm / 0.874 inch;  
Reel diameter of tape-and-reel packaging: 330; mm  
Tape Latime: 44; mm  
Design: with Cover;  
Tip montaj: Through-board;  
PCB contact: SMD;  
Culoare: white;  
Material group: I;  
Material izolator: Polyphthalamide (PPA GF);  
Flammability class per UL94: V0;  
Clamping spring material: Chrome nickel spring steel (CrNi);  
Contact material: Copper alloy;  
Contact plating: tin-plated;  
Greutate: 2,1; g  
Temperatura lucru: -60 ... +105 °C;  
Tip ambalare: BOX;  
Tara de origine: CH;  
GTIN: 4055143645157;  
Customs tariff number: 85369010000;  
Pret: 3,22 lei (TVA inclus)

Detalii online: <https://www.materialelectrice.ro/through-board-smd-pcb-terminal-block-0-75-mm2-pin-spacing-6-5-mm-2-pole-push-in-cage-clamp-in-tape-and-reel-packaging-0-75-mm2-white-142411>