


Furnizor: **Sc Trivolt Distribution SRL**  
 Reg. com.: J23/3300/2016  
 CIF: RO36421140  
 Adresa: Strada Apusului nr 3 ( primul  
 sens giratoriu Tehodor Pallady-  
 Autostrada Soarelui), Catelu, Ilfov  
 Banca: BRD  
 IBAN: RO34BRDE441SV13182234410

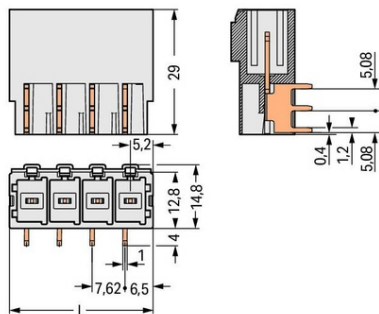

**WAGO THT MALE HEADER; 1.0 X 1.2 MM SOLDER PIN; ANGLED;  
 100% PROTECTED AGAINST MISMATING; PIN SPACING 7.62 MM; 5-  
 POLE; LIGHT GRAY**

Ratings per: IEC/EN 60664-1;  
 Tensiune nominala (III/3): 500; V  
 Tensiune nominala de supratensiune (III/3): 6; kV  
 Tensiune nominala (III/2): 630; V  
 Tensiune nominala de supratensiune (III/2): 6; kV  
 Tensiune nominala (II/2): 1000; V  
 Tensiune nominala de supratensiune (II/2): 6; kV  
 Curent nominal: 41; A  
 Legend (ratings): (III / 2)  $\hat{\%}$ ™ Overvoltage category III / Pollution degree 2;  
 Tensiune nominala UL (Use Group C): 300; V  
 Curent nominal UL (Use Group C): 42; A  
 Tensiune nominala UL (Use Group D): 600; V  
 Curent nominal UL (Use Group D): 5; A  
 Certificari: UL 1059;  
 Tensiune nominala CSA (Use Group C): 300; V  
 Curent nominal CSA (Use Group C): 41; A  
 Tensiune nominala CSA (Use Group D): 600; V  
 Curent nominal CSA (Use Group D): 5; A  
 Numar poli: 5;  
 Total number of potentials: 5;  
 Numar tipuri de conexiuni: 1;  
 Numar nivele: 1;  
 Distanta intre pini: 7.62 mm / 0.3 inch;  
 Latime: 40.98 mm / 1.613 inch;  
 Inaltime: 18.8 mm / 0.74 inch;  
 Inaltime de la fata: 14.8 mm / 0.583 inch;  
 Adancime: 29 mm / 1.142 inch;  
 Lungimea pinului de contact: 4; mm  
 Solder pin dimensions: 1 x 1.2 mm;  
 Diametrul de gaurire cu toleranta: 1.7 (+0.1) mm;  
 Tip contact (pluggable connector): Conector tata/fisa;  
 Connector (connection type): for PCBs;  
 Mismatching protection: Yes;  
 Mating direction to the PCB: 0; °  
 PCB contact: THT;  
 Solder pin arrangement: over the entire male connector, in line;  
 Number of solder pins per potential: 3;  
 Culoare: light gray;  
 Material group: I;  
 Material izolator: Polyamide 66 (PA 66);  
 Flammability class per UL94: V0;  
 Contact material: Cupru electrolitic(ECu);  
 Contact plating: tin-plated;  
 Fire load: 0,222; MJ  
 Greutate: 13,1; g  
 Temperatura lucru: -60 ... +105 °C;  
 Product Group: 3 (Multi Conn. System);  
 Tip ambalare: BOX;  
 Tara de origine: PL;  
 GTIN: 4045454002206;  
 Customs tariff number: 85366990990;  
 Pret: 22,63 lei (TVA inclus)

Detalii online: <https://www.materialelectrice.ro/tht-male-header-1-0-x-1-2-mm-solder-pin-angled-100-protected-against-mismatching-pin-spacing-7-62-mm-5-pole-light-gray-142650>