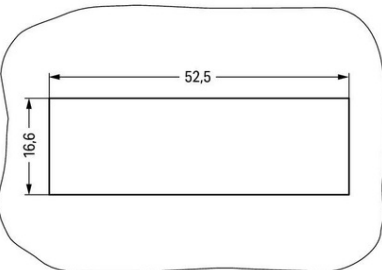


Furnizor: **Sc Trivolt Distribution SRL**  
Reg. com.: J23/3300/2016  
CIF: RO36421140  
Adresa: Strada Apusului nr 3 ( primul  
sens giratoriu Tehodor Pallady-  
Autostrada Soarelui), Catelu, Ilfov  
Banca: BRD  
IBAN: RO34BRDE441SV13182234410

 <p>Plate thickness: 0.5 ... 2 mm Cutout tolerance: + 0.1 mm</p>	<p align="center"><b>WAGO SNAP-IN SOCKET; 5-POLE; COD. B; 4,00 MM<sup>2</sup>; GRAY</b></p> <p>Note on Contact Resistance: approx. 1 mΩ; of contact resistance © approx. 0.25 mΩ; contact transition plug/socket; Ratings per: IEC/EN 60664-1; Tensiune nominala (III/3): 400; V Tensiune nominala de supratensiune (III/3): 6; kV Curent nominal: 25; A Legend (ratings): (III / 3) %™ Overvoltage category III / Pollution degree 3; Tensiune nominala UL 1977: 600; V Curent nominal UL 1977: 23; A Tehnologie conexiune: Push-in CAGE CLAMP®; Tip actionare: Operating tool; Push-in; Nominal cross-section: 4 mm<sup>2</sup>; Solid conductor: 0,5 ... 4 mm<sup>2</sup> / 20 ... 12 AWG; Solid conductor; push-in termination: 1,5 ... 4 mm<sup>2</sup> / 16 ... 12 AWG; Stranded conductor: 0,5 ... 2,5 mm<sup>2</sup> / 20 ... 14 AWG; Fine-stranded conductor: 0,5 ... 4 mm<sup>2</sup> / 20 ... 12 AWG; Fine-stranded conductor; with insulated ferrule: 0,25 ... 1,5 mm<sup>2</sup> / 20 ... 16 AWG; Fine-stranded conductor; with uninsulated ferrule: 0,25 ... 2,5 mm<sup>2</sup> / 20 ... 14 AWG; Fine-stranded conductor; with ferrule; push-in termination: 1,5 mm<sup>2</sup> / 16 AWG; Strip length: 9 mm / 0.35 inch; Note (strip length): see also packaging or instructions; Numar poli: 5; Numar total de conexiuni: 10; Total number of potentials: 5; Conductor entry direction to mating direction: 0; ° Distanta intre pini: 10 mm / 0.394 inch; Latime: 55,5 mm / 2.185 inch; Inaltime: 18,5 mm / 0.728 inch; Adancime: 36 mm / 1.417 inch; Coding: B; Mating force of a plug-in connection: approx. 20 ... 70 N (depending on pole number); Retention force of a plug-in connection: Locked: &gt; 80 N; Unmating force of a plug-in connection: Unlocked: approx. 20 ... 70 N (depending on pole number); Number of mating cycles: &gt;200, without resistive load 100, with resistive load IN = 25 A, tested (4 mm<sup>2</sup>/AWG 12); Housing sheet thickness: 0,5 ... 2 mm / 0.02 ... 0.079 inch; Tip montaj: Snap-in; Marking: 1 2 3 4 5; Protection type: IP20; Note on protection type: Only when mated (these compact connectors are not designed for use in open, easily accessible areas.); Potential marking: 1 2 3 4 5; Tip contact (pluggable connector): Conector mama/priza; Connector (connection type): for conductor; Mismating protection: Yes; Locking of plug-in connection: locking lever; Locking lever: yes; Culoare: gray; Material izolator: Polyamide 66 (PA 66); Clamping spring material: Chrome nickel spring steel (CrNi); Contact material: Copper or copper alloy (surface-treated); Fire load: 0,342; MJ Greutate: 19,1; g Processing temperature: -5 ... +40 °C; Continuous operating temperature: -35 ... +85 °C; Note on continuous operating temperature: Insulating parts for temperatures ≤ 105 °C; Tip ambalare: BOX; Tara de origine: DE; GTIN: 4055143594189; Customs tariff number: 85366990990; Pret: 23,52 lei (TVA inclus)</p> <p>Detalii online: <a href="https://www.materialelectrice.ro/snap-in-socket-5-pole-cod-b-4-00-mm2-gray-143113">https://www.materialelectrice.ro/snap-in-socket-5-pole-cod-b-4-00-mm2-gray-143113</a></p>
---	---