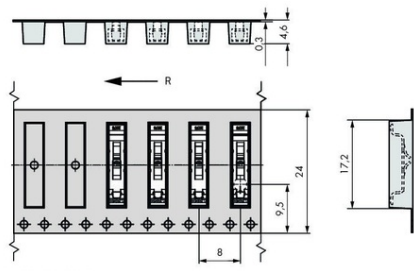


Furnizor: **Sc Trivolt Distribution SRL**
Reg. com.: J23/3300/2016
CIF: RO36421140
Adresa: Strada Apusului nr 3 (primul
sens giratoriu Tehodor Pallady-
Autostrada Soarelui), Catelu, Ilfov
Banca: BRD
IBAN: RO34BRDE441SV13182234410

 <p>R = Feed direction</p>	<p>WAGO THROUGH-BOARD SMD PCB TERMINAL BLOCK; PIN SPACING 3 MM; 1-POLE; PUSH WIRE®; IN TAPE-AND-REEL PACKAGING; WITHOUT HOUSING; 0,75 MM²</p> <p>Ratings per: IEC/EN 60664-1; Tensiune nominala (III/3): 200; V Tensiune nominala de supratensiune (III/3): 4; kV Tensiune nominala (II/2): 500; V Tensiune nominala de supratensiune (II/2): 4; kV Curent nominal: 9; A Legend (ratings): (III / 2) %TM Overvoltage category III / Pollution degree 2; Certificari: UL 1059; Tehnologie conexiune: PUSH WIRE®; Tip actionare: Push-in; Solid conductor: 0,34 ... 0,75 mm² / 20 ... 18 AWG; Strip length: 3,7 mm / 0.15 inch; Conductor connection direction to PCB: 90; ° Numar poli: 1; Numar total de conexiuni: 1; Total number of potentials: 1; Numar tipuri de conexiuni: 1; Numar nivele: 1; Latime: 3 mm / 0.118 inch; Inaltime: 3,9 mm / 0.154 inch; Adancime: 17,5 mm / 0.689 inch; Reel diameter of tape-and-reel packaging: 330; mm Tape Latime: 24; mm PCB contact: SMD; Material izolator: Polyamide 66 (PA 66); Flammability class per UL94: V0; Clamping spring material: Chrome nickel spring steel (CrNi); Contact material: Cupru electrolitic(ECu); Contact plating: tin-plated; Greutate: 0,2; g Temperatura lucru: -60 ... +105 °C; Tip ambalare: BOX; Tara de origine: CH; GTIN: 4055143607636; Customs tariff number: 85369010000; Pret: 1,67 lei (TVA inclus)</p> <p>Detalii online: https://www.materialelectrice.ro/through-board-smd-pcb-terminal-block-pin-spacing-3-mm-1-pole-push-wire-in-tape-and-reel-packaging-without-housing-0-75-mm2-143250</p>
---	--