


Furnizor: **Sc Trivolt Distribution SRL**  
Reg. com.: J23/3300/2016  
CIF: RO36421140  
Adresa: Strada Apusului nr 3 ( primul  
sens giratoriu Tehodor Pallady-  
Autostrada Soarelui), Catelu, Ilfov  
Banca: BRD  
IBAN: RO34BRDE441SV13182234410

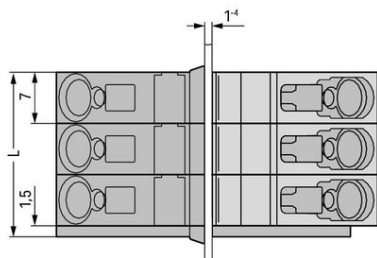

**WAGO FEEDTHROUGH TERMINAL BLOCK; 4 MM<sup>2</sup>; PIN SPACING 7 MM; 8-POLE; CAGE CLAMP<sup>®</sup>; 4,00 MM<sup>2</sup>; GRAY**

Ratings per: IEC/EN 60664-1;  
Ratings (note): Suitable for neutral-grounded, three-phase, 4-wire systems rated at 400 V (line-to-line) per IEC/EN 60664-1.;  
Tensiune nominala (III/3): 320; V  
Tensiune nominala de supratensiune (III/3): 4; kV  
Tensiune nominala (III/2): 320; V  
Tensiune nominala de supratensiune (III/2): 4; kV  
Tensiune nominala (II/2): 630; V  
Tensiune nominala de supratensiune (II/2): 4; kV  
Curent nominal: 32; A  
Legend (ratings): (III / 2)  $\hat{\%}$ ™ Overvoltage category III / Pollution degree 2;  
Tensiune nominala UL (Use Group B): 300; V  
Curent nominal UL (Use Group B): 20; A  
Tensiune nominala UL (Use Group C): 150; V  
Curent nominal UL (Use Group C): 20; A  
Tensiune nominala UL (Use Group D): 300; V  
Curent nominal UL (Use Group D): 10; A  
Certificari: UL 1059;  
Tensiune nominala CSA (Use Group B): 300; V  
Curent nominal CSA (Use Group B): 20; A  
Tensiune nominala CSA (Use Group C): 150; V  
Curent nominal CSA (Use Group C): 20; A  
Tensiune nominala CSA (Use Group D): 300; V  
Curent nominal CSA (Use Group D): 10; A  
Tehnologie conexiune: CAGE CLAMP<sup>®</sup>;  
Tip actionare: Operating tool;  
Solid conductor: 0.08 ... 4 mm<sup>2</sup> / 28 ... 12 AWG;  
Fine-stranded conductor: 0.08 ... 4 mm<sup>2</sup> / 28 ... 12 AWG;  
Fine-stranded conductor; with insulated ferrule: 0.25 ... 2.5 mm<sup>2</sup>;  
Fine-stranded conductor; with uninsulated ferrule: 0.25 ... 2.5 mm<sup>2</sup>;  
Strip length: 9 ... 10 mm / 0.35 ... 0.39 inch;  
Numar poli: 8;  
Numar total de conexiuni: 16;  
Total number of potentials: 8;  
Numar tipuri de conexiuni: 2;  
Numar nivele: 1;  
Distanta intre pini: 7 mm / 0.276 inch;  
Latime: 57.5 mm / 2.264 inch;  
Inaltime: 23.55 mm / 0.927 inch;  
Adancime: 42.5 mm / 1.673 inch;  
Tip montaj: Locking claw;  
Tip montaj: Feed-through mounting;  
Culoare: gray;  
Material group: I;  
Material izolator: Polyamide 66 (PA 66);  
Flammability class per UL94: V0;  
Clamping spring material: Chrome nickel spring steel (CrNi);  
Contact material: Cupru electrolitic (ECu);  
Contact plating: tin-plated;  
Fire load: 0,842; MJ  
Greutate: 46; g  
Temperatura lucru: -60 ... +105 °C;  
Product Group: 4 (Printed Circuit);  
Tip ambalare: BOX;  
Tara de origine: DE;  
GTIN: 4044918532822;  
Customs tariff number: 85369010000;  
Pret: 98,12 lei (TVA inclus)

Detalii online: <https://www.materialelectrice.ro/feedthrough-terminal-block-4-mm2-pin-spacing-7-mm-8-pole-cage-clamp-4-00-mm2-gray-143643>