


Furnizor: **Sc Trivolt Distribution SRL**
 Reg. com.: J23/3300/2016
 CIF: RO36421140
 Adresa: Strada Apusului nr 3 (primul
 sens giratoriu Tehodor Pallady-
 Autostrada Soarelui), Catelu, Ilfov
 Banca: BRD
 IBAN: RO34BRDE441SV13182234410

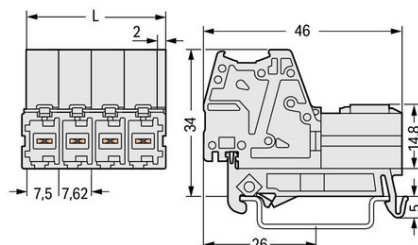

**WAGO 1-CONDUCTOR MALE CONNECTOR; 100% PROTECTED
 AGAINST MISMATING; DIN-35 RAIL MOUNTING; 10 MM²; PIN
 SPACING 7.62 MM; 4-POLE; 10,00 MM²; LIGHT GRAY**

Ratings per: IEC/EN 60664-1;
 Tensiune nominala (III/3): 800; V
 Tensiune nominala de supratensiune (III/3): 8; kV
 Tensiune nominala (III/2): 1000; V
 Tensiune nominala de supratensiune (III/2): 8; kV
 Tensiune nominala (II/2): 1000; V
 Tensiune nominala de supratensiune (II/2): 8; kV
 Curent nominal: 41; A
 Legend (ratings): (III / 2) \hat{a} %TM Overvoltage category III / Pollution degree 2;
 Tensiune nominala UL (Use Group C): 600; V
 Curent nominal UL (Use Group C): 42; A
 Certificari: UL 1059;
 Tensiune nominala CSA (Use Group C): 600; V
 Curent nominal CSA (Use Group C): 41; A
 Tehnologie conexiune: Push-in CAGE CLAMP®;
 Tip actionare: Operating tool;
 Solid conductor: 0,5 ... 10 mm² / 20 ... 8 AWG;
 Fine-stranded conductor: 0,5 ... 10 mm² / 20 ... 8 AWG;
 Fine-stranded conductor; with insulated ferrule: 0,5 ... 6 mm²;
 Fine-stranded conductor; with uninsulated ferrule: 0,5 ... 6 mm²;
 Strip length: 13 ... 15 mm / 0.51 ... 0.59 inch;
 Numar poli: 4;
 Tehnologie conexiune 2: Quick-connect/Solder contact;
 Numar total de conexiuni: 4;
 Total number of potentials: 4;
 Numar tipuri de conexiuni: 1;
 Numar nivele: 1;
 Distanta intre pini: 7,62 mm / 0.3 inch;
 Latime: 32,36 mm / 1.274 inch;
 Inaltime from upper-edge of DIN-rail: 34 mm / 1.339 inch;
 Adancime: 46 mm / 1.811 inch;
 Tip montaj: DIN-35 rail;
 Tip contact (pluggable connector): Conector tata/fisa;
 Connector (connection type): for conductors;
 Mismatching protection: Yes;
 Culoare: light gray;
 Material group: I;
 Material izolator: Polyamide 66 (PA 66);
 Flammability class per UL94: V0;
 Clamping spring material: Chrome nickel spring steel (CrNi);
 Contact material: Cupru electrolitic(ECu);
 Contact plating: tin-plated;
 Fire load: 0,592; MJ
 Greutate: 30,1; g
 Temperatura lucru: -60 ... +105 °C;
 Product Group: 3 (Multi Conn. System);
 Tip ambalare: BOX;
 Tara de origine: PL;
 GTIN: 4045454333782;
 Customs tariff number: 85366990990;
 Pret: 44,84 lei (TVA inclus)

Detalii online: <https://www.materialelectrice.ro/1-conductor-male-connector-100-protected-against-mismatching-din-35-rail-mounting-10-mm2-pin-spacing-7-62-mm-4-pole-10-00-mm2-light-gray-143935>