


Furnizor: **Sc Trivolt Distribution SRL**
 Reg. com.: J23/3300/2016
 CIF: RO36421140
 Adresa: Strada Apusului nr 3 (primul
 sens giratoriu Tehodor Pallady-
 Autostrada Soarelui), Catelu, Ilfov
 Banca: BRD
 IBAN: RO34BRDE441SV13182234410

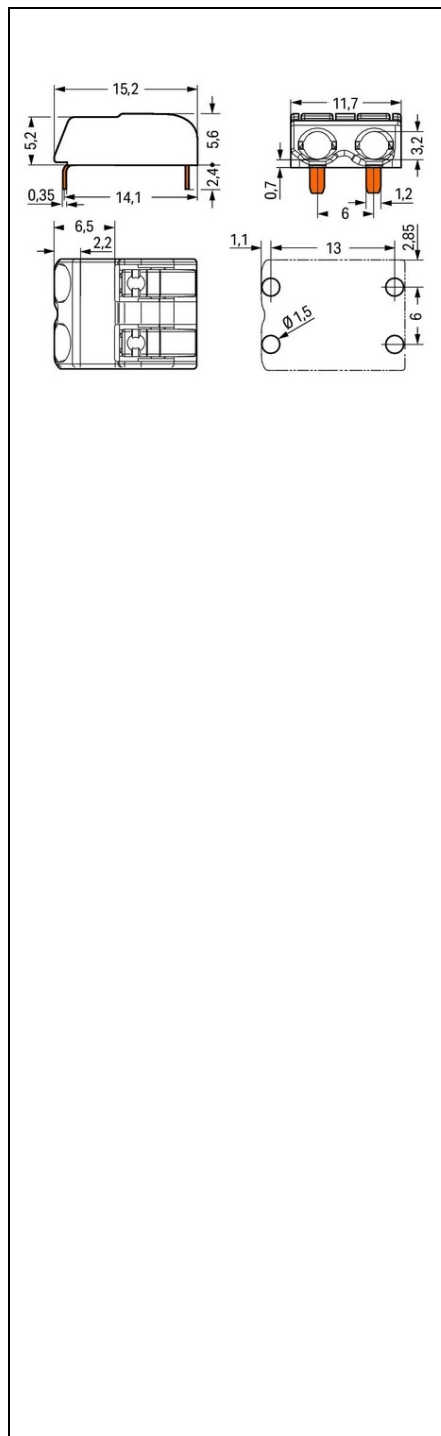

**WAGO THR PCB TERMINAL BLOCK; PUSH-BUTTON; 1.5 MM²; PIN
 SPACING 6 MM; 2-POLE; PUSH-IN CAGE CLAMP[®]; IN TAPE-AND-
 REEL PACKAGING; 1.50 MM²; WHITE**

Ratings per: IEC/EN 60664-1;
 Tensiune nominala (III/3): 250; V
 Tensiune nominala de supratensiune (III/3): 4; kV
 Tensiune nominala (III/2): 320; V
 Tensiune nominala de supratensiune (III/2): 4; kV
 Tensiune nominala (II/2): 630; V
 Tensiune nominala de supratensiune (II/2): 4; kV
 Curent nominal: 17,5; A
 Legend (ratings): (III / 2) \hat{a} %TM Overvoltage category III / Pollution degree 2;
 Tensiune nominala UL (Use Group B): 300; V
 Curent nominal UL (Use Group B): 10; A
 Tensiune nominala UL (Use Group D): 300; V
 Curent nominal UL (Use Group D): 10; A
 Certificari: UL 1059;
 Tehnologie conexiune: Push-in CAGE CLAMP[®];
 Tip actionare: Push-button;
 Solid conductor: 0,5 ... 1,5 mm² / 20 ... 16 AWG;
 Fine-stranded conductor: 0,5 ... 1,5 mm² / 20 ... 16 AWG;
 Fine-stranded conductor; with insulated ferrule: 0,5 ... 0,75 mm²;
 Fine-stranded conductor; with uninsulated ferrule: 0,5 ... 0,75 mm²;
 Strip length: 7 ... 10 mm / 0.28 ... 0.39 inch;
 Conductor connection direction to PCB: 0; °
 Numar poli: 2;
 Numar total de conexiuni: 2;
 Total number of potentials: 2;
 Numar tipuri de conexiuni: 1;
 Numar nivele: 1;
 Distanta intre pini: 6 mm / 0.24 inch;
 Latime: 11,7 mm / 0.461 inch;
 Inaltime: 8 mm / 0.315 inch;
 Inaltime de la fata: 5,6 mm / 0.22 inch;
 Adancime: 15,2 mm / 0.598 inch;
 Lungimea pinului de contact: 2,4; mm
 Solder pin dimensions: 1,2 x 0,35 mm;
 Diametru placat prin gaura (THR): 1,5 (+0,1) mm;
 Reel diameter of tape-and-reel packaging: 330; mm
 Tape Latime: 24; mm
 PCB contact: THR;
 Solder pin arrangement: over the entire terminal strip (in-line);
 Number of solder pins per potential: 2;
 Culoare: white;
 Material group: I;
 Material izolator: Polyphthalamide (PPA GF);
 Flammability class per UL94: V0;
 Clamping spring material: Chrome nickel spring steel (CrNi);
 Contact material: Copper alloy;
 Contact plating: tin-plated;
 Greutate: 1,1; g
 Temperatura lucru: -60 ... +105 °C;
 Tip ambalare: BOX;
 Tara de origine: CN;
 GTIN: 4055143274692;
 Customs tariff number: 85369010000;
 Pret: 6,08 lei (TVA inclus)

Detalii online: <https://www.materialelectrice.ro/thr-pcb-terminal-block-push-button-1-5-mm2-pin-spacing-6-mm-2-pole-push-in-cage-clamp-in-tape-and-reel-packaging-1-50-mm2-white-144202>