


Furnizor: **Sc Trivolt Distribution SRL**
Reg. com.: J23/3300/2016
CIF: RO36421140
Adresa: Strada Apusului nr 3 (primul
sens giratoriu Tehodor Pallady-
Autostrada Soarelui), Catelu, Ilfov
Banca: BRD
IBAN: RO34BRDE441SV13182234410

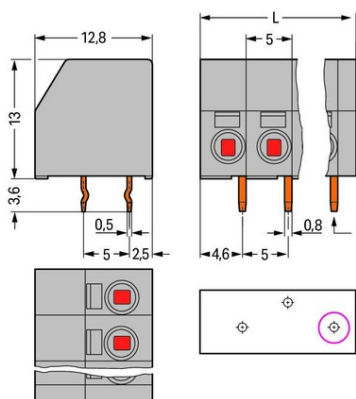

**WAGO 2-CONDUCTOR PCB TERMINAL BLOCK; 1.5 MM²; PIN
SPACING 5 MM; 6-POLE; PUSH WIRE[®]; 1.50 MM²; GRAY**

Ratings per: IEC/EN 60664-1;
Tensiune nominala (III/3): 320; V
Tensiune nominala de supratensiune (III/3): 4; kV
Tensiune nominala (III/2): 320; V
Tensiune nominala de supratensiune (III/2): 4; kV
Tensiune nominala (II/2): 630; V
Tensiune nominala de supratensiune (II/2): 4; kV
Curent nominal: 17,5; A
Legend (ratings): (III / 2) $\hat{a}\%$ ™ Overvoltage category III / Pollution degree 2;
Tensiune nominala UL (Use Group B): 300; V
Curent nominal UL (Use Group B): 8; A
Tensiune nominala UL (Use Group D): 300; V
Curent nominal UL (Use Group D): 8; A
Certificari: UL 1059;
Tensiune nominala CSA (Use Group B): 300; V
Curent nominal CSA (Use Group B): 8; A
Tensiune nominala CSA (Use Group D): 300; V
Curent nominal CSA (Use Group D): 8; A
Connection type (1): PUSH WIRE[®] connection;
Tehnologie conexiune: PUSH WIRE[®];
Number of connection points (connection type): 1;
Tip actionare: Operating tool;
Solid conductor: 0,5 ... 1,5 mm² / 20 ... 16 AWG;
Strip length: 8,5 ... 9,5 mm / 0.33 ... 0.37 inch;
Note (strip length): 7 ... 8 mm / 0.28 ... 0.31 inch (for wiring on both sides);
Conductor connection direction to PCB: 0; °
Numar poli: 6;
Connection type 2: PUSH WIRE[®] connection;
Tehnologie conexiune 2: PUSH WIRE[®];
Number of connection points: 1;
Solid conductor 2: 0,5 ... 1,5 mm² / 20 ... 16 AWG;
Strip length 2: 8,5 ... 9,5 mm / 0.33 ... 0.37 inch;
Note (strip length) 2: 7 ... 8 mm / 0.28 ... 0.31 inch (for wiring on both sides);
Conductor connection direction to PCB 2: 90; °
Numar total de conexiuni: 12;
Total number of potentials: 6;
Numar tipuri de conexiuni: 2;
Numar nivele: 2;
Distanta intre pini: 5 mm / 0.197 inch;
Latime: 32 mm / 1.26 inch;
Inaltime: 16,6 mm / 0.654 inch;
Inaltime de la fata: 13 mm / 0.512 inch;
Adancime: 12,8 mm / 0.504 inch;
Lungimea pinului de contact: 3,6; mm
Solder pin dimensions: 0,5 x 0,8 mm;
Diametrul de gaurire cu toleranta: 1,1 (+0,1) mm;
PCB contact: THT;
Solder pin arrangement: over the entire terminal strip (staggered);
Number of solder pins per potential: 1;
Culoare: gray;
Material group: I;
Material izolator: Polyamide 66 (PA 66);
Flammability class per UL94: V0;
Clamping spring material: Chrome nickel spring steel (CrNi);
Contact material: Cupru electrolitic (ECu);
Contact plating: tin-plated;
Fire load: 0,112; MJ
Greutate: 5,4; g
Temperatura lucru: -60 ... +105 °C;
Product Group: 4 (Printed Circuit);
Tip ambalare: BOX;
Tara de origine: CN;
GTIN: 4044918689366;
Customs tariff number: 85369010000;
Pret: 8,42 lei (TVA inclus)

Detalii online: <https://www.materialelectrice.ro/2-conductor-pcb-terminal-block-1-5-mm2-pin-spacing-5-mm-6-pole-push-wire-1-50-mm2-gray-144309>