


Furnizor: **Sc Trivolt Distribution SRL**  
 Reg. com.: J23/3300/2016  
 CIF: RO36421140  
 Adresa: Strada Apusului nr 3 ( primul  
 sens giratoriu Tehodor Pallady-  
 Autostrada Soarelui), Catelu, Ilfov  
 Banca: BRD  
 IBAN: RO34BRDE441SV13182234410

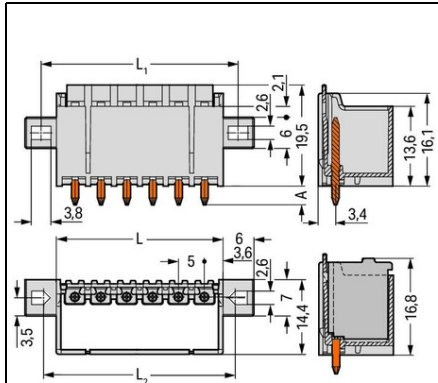

**WAGO THT MALE HEADER; 1.4 MM  $\tilde{\sim}$  SOLDER PIN; STRAIGHT;  
 CLAMPING COLLAR; PIN SPACING 5 MM; 3-POLE; LIGHT GRAY**

Ratings per: IEC/EN 60664-1;  
 Tensiune nominala (III/3): 250; V  
 Tensiune nominala de supratensiune (III/3): 4; kV  
 Tensiune nominala (III/2): 320; V  
 Tensiune nominala de supratensiune (III/2): 4; kV  
 Tensiune nominala (II/2): 630; V  
 Tensiune nominala de supratensiune (II/2): 4; kV  
 Curent nominal: 16; A  
 Legend (ratings): (III / 2)  $\hat{\sim}$ ™ Overvoltage category III / Pollution degree 2;  
 Tensiune nominala UL (Use Group B): 300; V  
 Curent nominal UL (Use Group B): 15; A  
 Tensiune nominala UL (Use Group D): 300; V  
 Curent nominal UL (Use Group D): 10; A  
 Certificari: UL 1059;  
 Numar poli: 3;  
 Total number of potentials: 3;  
 Numar tipuri de conexiuni: 1;  
 Numar nivele: 1;  
 Distanta intre pini: 5 mm / 0.197 inch;  
 Latime: 29,2 mm / 1.15 inch;  
 Inaltime: 23,1 mm / 0.909 inch;  
 Inaltime de la fata: 19,5 mm / 0.768 inch;  
 Adancime: 14,4 mm / 0.567 inch;  
 Lungimea pinului de contact: 3,6; mm  
 Diametrul pinului de contact: 1,4; mm  
 Diametrul de gaurire cu toleranta: 1,6 (+0,1) mm;  
 Tip montaj: Mounting flange;  
 Tip montaj: Feed-through mounting; Panel mounting;  
 Tip contact (pluggable connector): Conector tata/fisa;  
 Connector (connection type): for PCB;  
 Mismatching protection: No;  
 Mating direction to the PCB: 90; °  
 Locking of plug-in connection: Locking latch;  
 PCB contact: THT;  
 Culoare: light gray;  
 Material group: I;  
 Material izolator: Polyphthalamide (PPA GF);  
 Flammability class per UL94: V0;  
 Contact material: Cupru electrolitic(ECu);  
 Contact plating: tin-plated;  
 Fire load: 0,058; MJ  
 Greutate: 2,5; g  
 Temperatura lucru: -60 ... +100 °C;  
 Product Group: 26 (picoMAX);  
 Tip ambalare: BOX;  
 Tara de origine: DE;  
 GTIN: 4050821165552;  
 Customs tariff number: 85366990990;  
 Pret: 5,79 lei (TVA inclus)

Detalii online: <https://www.materialelectrice.ro/tht-male-header-1-4-mm-oe-solder-pin-straight-clamping-collar-pin-spacing-5-mm-3-pole-light-gray-144318>