


Furnizor: **Sc Trivolt Distribution SRL**
 Reg. com.: J23/3300/2016
 CIF: RO36421140
 Adresa: Strada Apusului nr 3 (primul
 sens giratoriu Tehodor Pallady-
 Autostrada Soarelui), Catelu, Ilfov
 Banca: BRD
 IBAN: RO34BRDE441SV13182234410

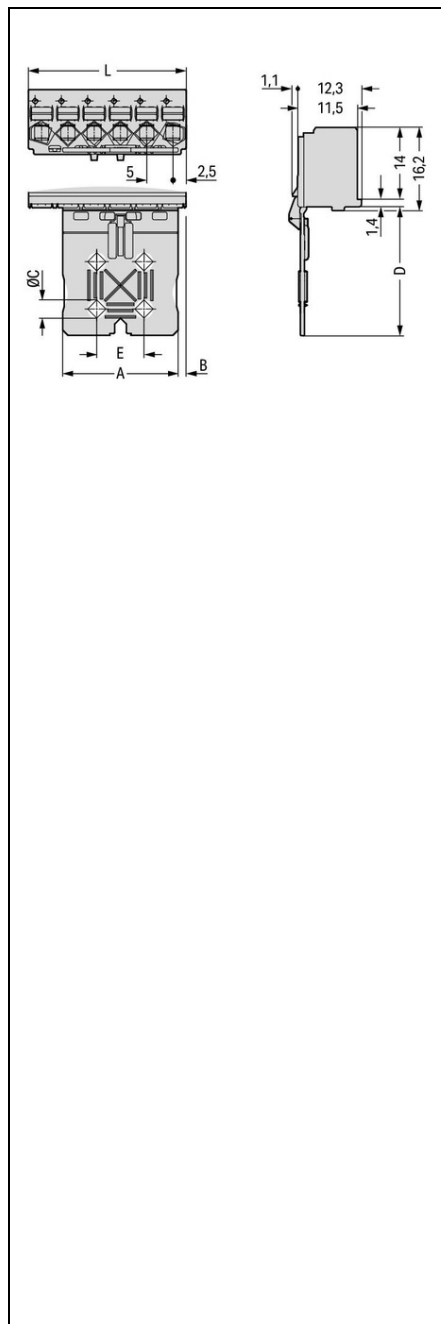

**WAGO 1-CONDUCTOR FEMALE PLUG; GRIPPING PLATE SLIDING
 CONNECTOR RELEASE; 2.5 MM²; PIN SPACING 5 MM; 7-POLE; 2,50
 MM²; LIGHT GRAY**

Ratings per: IEC/EN 60664-1;
 Tensiune nominala (III/3): 250; V
 Tensiune nominala de supratensiune (III/3): 4; kV
 Tensiune nominala (III/2): 320; V
 Tensiune nominala de supratensiune (III/2): 4; kV
 Tensiune nominala (II/2): 630; V
 Tensiune nominala de supratensiune (II/2): 4; kV
 Curent nominal: 16; A
 Legend (ratings): (III / 2) $\hat{\%}$ ™ Overvoltage category III / Pollution degree 2;
 Tensiune nominala UL (Use Group B): 300; V
 Curent nominal UL (Use Group B): 15; A
 Tensiune nominala UL (Use Group D): 300; V
 Curent nominal UL (Use Group D): 10; A
 Certificari: UL 1059;
 Tehnologie conexiune: Push-in CAGE CLAMP®;
 Tip actionare: Push-button;
 Solid conductor: 0.2 ... 2.5 mm² / 24 ... 12 AWG;
 Fine-stranded conductor: 0.2 ... 2.5 mm² / 24 ... 12 AWG;
 Fine-stranded conductor; with insulated ferrule: 0.25 ... 1.5 mm²;
 Fine-stranded conductor; with uninsulated ferrule: 0.25 ... 2.5 mm²;
 Strip length: 9 ... 10 mm / 0.35 ... 0.39 inch;
 Numar poli: 7;
 Numar total de conexiuni: 7;
 Total number of potentials: 7;
 Numar tipuri de conexiuni: 1;
 Numar nivele: 1;
 Distanta intre pini: 5 mm / 0.197 inch;
 Latime: 35 mm / 1.378 inch;
 Inaltime: 40.4 mm / 1.591 inch;
 Adancime: 14.4 mm / 0.567 inch;
 Design: With gripping plate and sliding connector release;
 Tip contact (pluggable connector): Conector mama/priza;
 Connector (connection type): for conductors;
 Mismatching protection: No;
 Culoare: light gray;
 Material group: I;
 Material izolator: Polyphthalamide (PPA GF);
 Flammability class per UL94: V0;
 Clamping spring material: Chrome nickel spring steel (CrNi);
 Contact material: Cupru electrolitic (ECu);
 Contact plating: tin-plated;
 Fire load: 0,166; MJ
 Greutate: 7,1; g
 Temperatura lucru: -60 ... +100 °C;
 Product Group: 26 (picoMAX);
 Tip ambalare: BOX;
 Tara de origine: DE;
 GTIN: 4050821850816;
 Customs tariff number: 85366990990;
 Pret: 24,00 lei (TVA inclus)

Detalii online: <https://www.materialelectrice.ro/1-conductor-female-plug-gripping-plate-sliding-connector-release-2-5-mm2-pin-spacing-5-mm-7-pole-2-50-mm2-light-gray-144430>