


Furnizor: **Sc Trivolt Distribution SRL**
Reg. com.: J23/3300/2016
CIF: RO36421140
Adresa: Strada Apusului nr 3 (primul
sens giratoriu Tehodor Pallady-
Autostrada Soarelui), Catelu, Ilfov
Banca: BRD
IBAN: RO34BRDE441SV13182234410

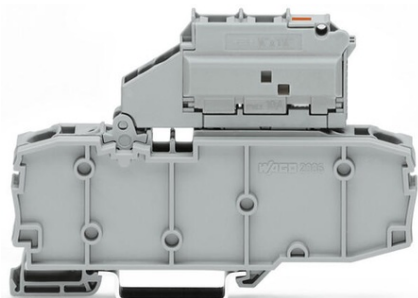

WAGO 2-CONDUCTOR FUSE TERMINAL BLOCK; WITH PIVOTING FUSE HOLDER; WITH END PLATE; FOR GLASS CARTRIDGE FUSE 1 1/4" X 1 1/4"; WITH BLOWN FUSE INDICATION BY LED; 30 - 65 V; FOR DIN-RAIL 35 X 15 AND 35 X 7.5; 6 MM²; PUSH-IN CAGE CLAMP®; 6.00 MM²; GRAY

Ratings per: IEC/EN 60947-7-3;
Tensiune nominala (III/3): 800; V
Tensiune nominala de supratensiune (III/3): 8; kV
Curent nominal: 10; A
Operation status indicator: 30 ... 65 V;
Legend (ratings): (III / 3) % Overvoltage category III / Pollution degree 3;
Tensiune nominala UL (Use Group B): 65; V
Curent nominal UL (Use Group B): 15; A
Tensiune nominala UL (Use Group C): 65; V
Curent nominal UL (Use Group C): 15; A
Certificari: UL 1059;
Tensiune nominala CSA (Use Group B): 600; V
Curent nominal CSA (Use Group B): 15; A
Tensiune nominala CSA (Use Group C): 600; V
Curent nominal CSA (Use Group C): 15; A
Tehnologie conexiune: Push-in CAGE CLAMP®;
Tip actionare: Push-in; Open Tool Slot;
Connectable conductor materials: Copper;
Nominal cross-section: 6 mm²;
Solid conductor: 0,5 ... 10 mm² / 20 ... 8 AWG;
Solid conductor; push-in termination: 1 ... 10 mm² / 14 ... 8 AWG;
Fine-stranded conductor: 0,5 ... 10 mm² / 20 ... 8 AWG;
Fine-stranded conductor; with insulated ferrule: 2,5 ... 6 mm² / 16 ... 10 AWG;
Fine-stranded conductor; with ferrule; push-in termination: 2,5 ... 6 mm² / 16 ... 10 AWG;
Strip length: 13 ... 15 mm / 0.51 ... 0.59 inch;
Numar total de conexiuni: 2;
Total number of potentials: 1;
Numar nivele: 1;
Wiring type: Front-entry wiring;
Number of jumper slots: 2;
Latime: 10,4 mm / 0.409 inch;
Inaltime from upper-edge of DIN-rail: 59 mm / 2.323 inch;
Adancime: 96,3 mm / 3.791 inch;
Design: horizontal;
Tip montaj: DIN-35 rail;
Marking level: Center/side marking;
Culoare: gray;
Material izolator: Polyamide 66 (PA 66);
Greutate: 29,9; g
Product Group: 22 (TOPJOB S);
Tip ambalare: BOX;
Tara de origine: DE;
GTIN: 4045454824099;
Customs tariff number: 85369095990;
Pret: 80,72 lei (TVA inclus)

Detalii online: <https://www.materialelectrice.ro/2-conductor-fuse-terminal-block-with-pivoting-fuse-holder-with-end-plate-for-glass-cartridge-fuse-x-1-with-blown-fuse-indication-by-led-30-65-v-for-din-rail-35-x-15-and-35-x-7-5-6-mm2-push-in-cage-clamp-6-00-mm2-gray-144638>