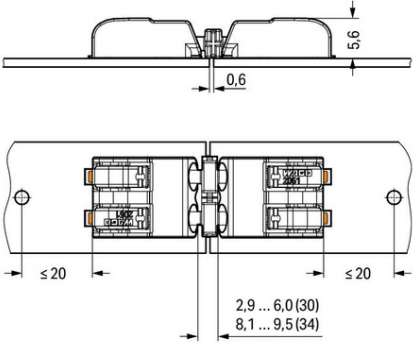


Furnizor: **Sc Trivolt Distribution SRL**  
Reg. com.: J23/3300/2016  
CIF: RO36421140  
Adresa: Strada Apusului nr 3 ( primul  
sens giratoriu Tehodor Pallady-  
Autostrada Soarelui), Catelu, Ilfov  
Banca: BRD  
IBAN: RO34BRDE441SV13182234410

|   |   |
|---|---|
|  | <p><b>WAGO BOARD-TO-BOARD LINK; PIN SPACING 6 MM; 1-POLE;<br/>LENGTH: 34 MM; WHITE</b></p> <p>Ratings per: IEC/EN 60664-1;<br/>Tensiune nominala (III/3): 250; V<br/>Tensiune nominala de supratensiune (III/3): 4; kV<br/>Tensiune nominala (III/2): 320; V<br/>Tensiune nominala de supratensiune (III/2): 4; kV<br/>Tensiune nominala (II/2): 630; V<br/>Tensiune nominala de supratensiune (II/2): 4; kV<br/>Curent nominal: 9; A<br/>Legend (ratings): (III / 2) % Overvoltage category III / Pollution degree 2;<br/>Certificari: UL 1059;<br/>Numar poli: 1;<br/>Total number of potentials: 1;<br/>Numar tipuri de conexiuni: 1;<br/>Distanta intre pini: 6 mm / 0.236 inch;<br/>Latime: 5,7 mm / 0.224 inch;<br/>Inaltime: 2,5 mm / 0.098 inch;<br/>Adancime: 34 mm / 1.339 inch;<br/>Mating cycles (max.): 10;<br/>Number of mating cycles: max. 10 connections/disconnections;<br/>Suitable: for SMD PCB Terminal Blocks; 2061 Series;<br/>Culoare: white;<br/>Material group: I;<br/>Material izolator: Polyamide 66 (PA 66);<br/>Flammability class per UL94: V0;<br/>Contact material: Copper alloy;<br/>Contact plating: silver-plated;<br/>Greutate: 0,3; g<br/>Temperatura lucru: -60 ... +105 °C;<br/>Tip ambalare: BOX;<br/>Tara de origine: CN;<br/>GTIN: 4055143656849;<br/>Customs tariff number: 85369010000;<br/>Pret: 1,43 lei (TVA inclus)</p> <p>Detalii online: <a href="https://www.materialelectrice.ro/board-to-board-link-pin-spacing-6-mm-1-pole-length-34-mm-white-146262">https://www.materialelectrice.ro/board-to-board-link-pin-spacing-6-mm-1-pole-length-34-mm-white-146262</a></p> |
|---|---|