


Furnizor: **Sc Trivolt Distribution SRL**  
Reg. com.: J23/3300/2016  
CIF: RO36421140  
Adresa: Strada Apusului nr 3 ( primul  
sens giratoriu Tehodor Pallady-  
Autostrada Soarelui), Catelu, Ilfov  
Banca: BRD  
IBAN: RO34BRDE441SV13182234410

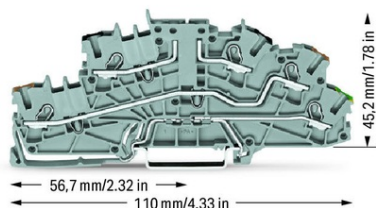

**WAGO MULTILEVEL INSTALLATION TERMINAL BLOCK; 4 MM<sup>2</sup>;**  
**CARRIER TERMINAL BLOCK WITHOUT KNIFE; P2/P1/PE; BLACK**  
**UPPER DECK; BROWN MIDDLE DECK; GREEN-YELLOW LOWER**  
**DECK; PUSH-IN CAGE CLAMP®; 2,50 MM<sup>2</sup>; GRAY**

Ratings (note): Potential - ground;  
Tensiune nominala (III/3): 250; V  
Tensiune nominala de supratensiune (III/3): 4; kV  
Curent nominal: 10; A  
Ratings (note) 2: Potential - potential;  
Tensiune nominala (III/3) 2: 400; V  
Tensiune nominala de supratensiune (III/3) 2: 6; kV  
Legend (ratings): (III / 3) à‰™ Overvoltage category III / Pollution degree 3;  
Tensiune nominala UL (Use Group B): 250; V  
Curent nominal UL (Use Group B): 6,3; A  
Tensiune nominala UL (Use Group C): 250; V  
Curent nominal UL (Use Group C): 6,3; A  
Certificari: UL 1059;  
Tensiune nominala CSA (Use Group C): 300; V  
Curent nominal CSA (Use Group C): 20; A  
Tehnologie conexiune: Push-in CAGE CLAMP®;  
Tip actionare: Push-in; Open Tool Slot;  
Connectable conductor materials: Copper;  
Nominal cross-section: 2,5 mm<sup>2</sup>;  
Solid conductor: 0,25 ... 4 mm<sup>2</sup> / 22 ... 12 AWG;  
Solid conductor; push-in termination: 0,75 ... 4 mm<sup>2</sup> / 18 ... 12 AWG;  
Fine-stranded conductor: 0,25 ... 4 mm<sup>2</sup> / 22 ... 12 AWG;  
Fine-stranded conductor; with insulated ferrule: 1 ... 2,5 mm<sup>2</sup> / 18 ... 12 AWG;  
Fine-stranded conductor; with ferrule; push-in termination: 1 ... 2,5 mm<sup>2</sup> / 18 ... 12 AWG;  
Strip length: 10 ... 12 mm / 0.39 ... 0.47 inch;  
Numar total de conexiuni: 5;  
Total number of potentials: 3;  
Numar nivele: 3;  
Wiring type: Front-entry wiring;  
Note (conductor cross-section): Depending on the conductor characteristic, a conductor with a smaller cross-section can also be inserted via push-in termination.;  
Latime: 5,2 mm / 0.205 inch;  
Inaltime from upper-edge of DIN-rail: 45,2 mm / 1.78 inch;  
Adancime: 110 mm / 4.331 inch;  
Design: angled;  
Tip montaj: DIN-35 rail;  
Potential marking: P2/P1/PE;  
Marking level: Center/side marking;  
Culoare: gray;  
Material izolator: Polyamide 66 (PA 66);  
Fire load: 0,309; MJ  
Greutate: 19,9; g  
Product Group: 22 (TOPJOB S);  
Tip ambalare: BOX;  
Tara de origine: CN;  
GTIN: 4050821464525;  
Customs tariff number: 85369010000;  
Pret: 23,16 lei (TVA inclus)

Detalii online: <https://www.materialelectrice.ro/multilevel-installation-terminal-block-4-mm2-carrier-terminal-block-without-knife-p2-p1-pe-black-upper-deck-brown-middle-deck-green-yellow-lower-deck-push-in-cage-clamp-2-50-mm2-gray-146333>