


Furnizor: **Sc Trivolt Distribution SRL**
Reg. com.: J23/3300/2016
CIF: RO36421140
Adresa: Strada Apusului nr 3 (primul
sens giratoriu Tehodor Pallady-
Autostrada Soarelui), Catelu, Ilfov
Banca: BRD
IBAN: RO34BRDE441SV13182234410

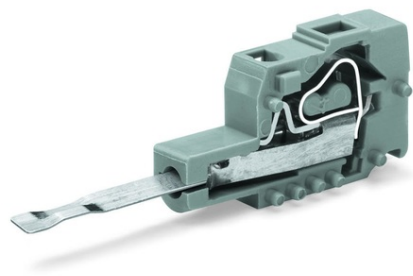

**WAGO TESTING PLUG MODULE WITH CONTACT STUD; PIN SPACING
5 MM / 0.197 IN; 2,50 MM²; GRAY**

Ratings per: IEC/EN 60664-1;
Tensiune nominala (III/2): 250; V
Tensiune nominala de supratensiune (III/2): 2,5; kV
Curent nominal: 0,5; A
Legend (ratings): (III / 2) $\hat{\%}$ ™ Overvoltage category III / Pollution degree 2;
Certificari: UL 1059;
Tehnologie conexiune: CAGE CLAMP®;
Solid conductor: 0,08 ... 2,5 mm² / 28 ... 12 AWG;
Fine-stranded conductor: 0,08 ... 2,5 mm² / 28 ... 12 AWG;
Strip length: 12 ... 13 mm / 0.47 ... 0.51 inch;
Numar total de conexiuni: 1;
Total number of potentials: 1;
Numar tipuri de conexiuni: 1;
Distanta intre pini: 5 mm / 0.197 inch;
Latime: 5 mm / 0.197 inch;
Inaltime: 14,3 mm / 0.563 inch;
Adancime: 44,45 mm / 1.75 inch;
Test contact length: 18; mm
Application: Testing wired terminal blocks with 0.75 ... 1.5 mm² "f-st" or 0.5 mm² "sol."
conductors;
Suitable: for 280, 736, 737, 738, 780 Series;
Culoare: gray;
Material group: I;
Material izolator: Polyamide 66 (PA 66);
Flammability class per UL94: V0;
Clamping spring material: Chrome nickel spring steel (CrNi);
Contact material: Cupru electrolitic(ECu);
Contact plating: tin-plated;
Fire load: 0,024; MJ
Greutate: 1,9; g
Temperatura lucru: -60 ... +105 °C;
Product Group: 3 (Multi Conn. System);
Tip ambalare: BOX;
Tara de origine: DE;
GTIN: 4017332315425;
Customs tariff number: 85366990990;
Pret: 18,93 lei (TVA inclus)

Detalii online: <https://www.materialelectrice.ro/testing-plug-module-with-contact-stud-pin-spacing-5-mm-0-197-in-2-50-mm2-gray-146360>