


Furnizor: **Sc Trivolt Distribution SRL**  
Reg. com.: J23/3300/2016  
CIF: RO36421140  
Adresa: Strada Apusului nr 3 ( primul  
sens giratoriu Tehodor Pallady-  
Autostrada Soarelui), Catelu, Ilfov  
Banca: BRD  
IBAN: RO34BRDE441SV13182234410

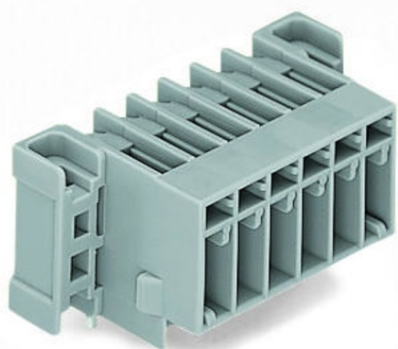

**WAGO THT MALE HEADER; 1.0 X 1.0 MM SOLDER PIN; ANGLED;  
CLAMPING COLLAR; PIN SPACING 5 MM; 2-POLE; GRAY**

Tensiune nominala (III/3): 250; V  
Tensiune nominala de supratensiune (III/3): 4; kV  
Tensiune nominala (III/2): 500; V  
Tensiune nominala de supratensiune (III/2): 4; kV  
Curent nominal: 32; A  
Legend (ratings): (III / 3)  $\hat{\%}$ ™ Overvoltage category III / Pollution degree 3;  
Numar poli: 2;  
Total number of potentials: 2;  
Numar nivele: 1;  
Distanta intre pini: 5 mm / 0.197 inch;  
Latime: 24,7 mm / 0.972 inch;  
Inaltime de la fata: 18,3 mm / 0.72 inch;  
Adancime: 22,2 mm / 0.874 inch;  
Tip montaj: Mounting flange;  
Tip contact (pluggable connector): Conector tata/fisa;  
Connector (connection type): for PCB;  
Mismatching protection: No;  
Mating direction to the PCB: 0; °  
PCB contact: THT;  
Culoare: gray;  
Material izolator: Polyamide 66 (PA 66);  
Fire load: 0,085; MJ  
Greutate: 3,6; g  
Product Group: 18 (X-COM-System);  
Tip ambalare: BOX;  
Tara de origine: PL;  
GTIN: 4044918396516;  
Customs tariff number: 85366990990;  
Pret: 4,17 lei (TVA inclus)

Detalii online: <https://www.materialeelectrice.ro/tht-male-header-1-0-x-1-0-mm-solder-pin-angled-clamping-collar-pin-spacing-5-mm-2-pole-gray-146503>