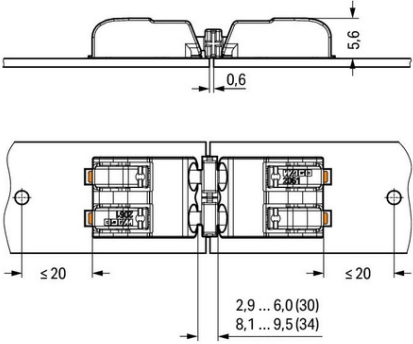


Furnizor: **Sc Trivolt Distribution SRL**
Reg. com.: J23/3300/2016
CIF: RO36421140
Adresa: Strada Apusului nr 3 (primul
sens giratoriu Tehodor Pallady-
Autostrada Soarelui), Catelu, Ilfov
Banca: BRD
IBAN: RO34BRDE441SV13182234410

| | |
|---|---|
|  | <p><u>WAGO BOARD-TO-BOARD LINK; PIN SPACING 6 MM; 2-POLE; LENGTH: 30 MM; WHITE</u></p> <p>Ratings per: IEC/EN 60664-1; Tensiune nominala (III/3): 250; V Tensiune nominala de supratensiune (III/3): 4; kV Tensiune nominala (III/2): 320; V Tensiune nominala de supratensiune (III/2): 4; kV Tensiune nominala (II/2): 630; V Tensiune nominala de supratensiune (II/2): 4; kV Curent nominal: 9; A Legend (ratings): (III / 2) % Overvoltage category III / Pollution degree 2; Certificari: UL 1059; Numar poli: 2; Total number of potentials: 2; Numar tipuri de conexiuni: 1; Distanta intre pini: 6 mm / 0.236 inch; Latime: 11,7 mm / 0.461 inch; Inaltime: 2,5 mm / 0.098 inch; Adancime: 30 mm / 1.181 inch; Mating cycles (max.): 10; Number of mating cycles: max. 10 connections/disconnections; Suitable: for SMD PCB Terminal Blocks; 2061 Series; Culoare: white; Material group: I; Material izolator: Polyamide 66 (PA 66); Flammability class per UL94: V0; Contact material: Copper alloy; Contact plating: silver-plated; Greutate: 0,6; g Temperatura lucru: -60 ... +105 °C; Tip ambalare: BOX; Tara de origine: CN; GTIN: 4055143656832; Customs tariff number: 85369010000; Pret: 2,27 lei (TVA inclus)</p> <p>Detalii online: https://www.materialelectrice.ro/board-to-board-link-pin-spacing-6-mm-2-pole-length-30-mm-white-147086</p> |
|---|---|