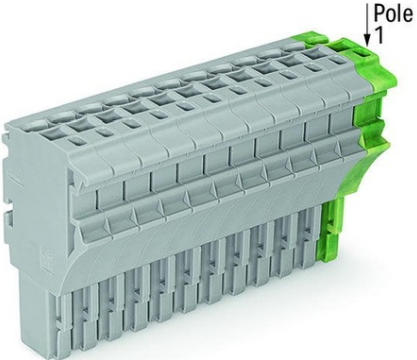


Furnizor: **Sc Trivolt Distribution SRL**
Reg. com.: J23/3300/2016
CIF: RO36421140
Adresa: Strada Apusului nr 3 (primul
sens giratoriu Tehodor Pallady-
Autostrada Soarelui), Catelu, Ilfov
Banca: BRD
IBAN: RO34BRDE441SV13182234410

	<p><u>WAGO 1-CONDUCTOR FEMALE PLUG; 2.5 MM²; 15-POLE; 2.50 MM²; GRAY, GREEN-YELLOW</u></p> <p>Ratings per: IEC/EN 61984; Tesiune nominala (III/3): 690; V Tensiune nominala de supratensiune (III/3): 6; kV Curent nominal: 24; A Curent nominal 2: 32; A Legend (ratings): (III / 3) %TM Overvoltage category III / Pollution degree 3; Tehnologie conexiune: Push-in CAGE CLAMP®; Tip actionare: Open Tool Slot; Push-in; Connectable conductor materials: Copper; Nominal cross-section: 2.5 mm²; Solid conductor: 0.25 ... 4 mm² / 22 ... 12 AWG; Solid conductor; push-in termination: 0.75 ... 4 mm² / 18 ... 12 AWG; Fine-stranded conductor: 0.25 ... 4 mm² / 22 ... 12 AWG; Fine-stranded conductor; with insulated ferrule: 1 ... 2.5 mm² / 18 ... 12 AWG; Fine-stranded conductor; with ferrule; push-in termination: 1 ... 2.5 mm² / 18 ... 12 AWG; Strip length: 10 ... 12 mm / 0.39 ... 0.47 inch; Numar poli: 15; Numar total de conexiuni: 15; Total number of potentials: 15; Wiring type: Front-entry wiring; Note (conductor cross-section): Depending on the conductor characteristic, a conductor with a smaller cross section can also be inserted via push-in termination.; Latime: 78 mm / 3.071 inch; Inaltime: 40.5 mm / 1.594 inch; Adancime: 22.4 mm / 0.882 inch; Module Latime: 5.2 mm / 0.205 inch; Marking level: Side marking; Tip contact (pluggable connector): Conector mama/priza; Connector (connection type): for conductors; Culoare: gray, green-yellow; Material izolator: Polyamide 66 (PA 66); Fire load: 0,802; MJ Greutate: 49,5; g Product Group: 18 (X-COM-System); Tip ambalare: BOX; Tara de origine: DE; GTIN: 4045454912949; Customs tariff number: 85366990990; Pret: 67,88 lei (TVA inclus)</p> <p>Detalii online: https://www.materialelectrice.ro/1-conductor-female-plug-2-5-mm2-15-pole-2-50-mm2-gray-green-yellow-150073</p>
---	--