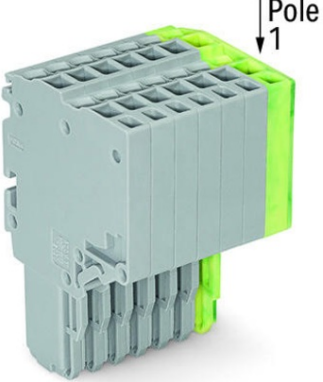


Furnizor: **Sc Trivolt Distribution SRL**  
Reg. com.: J23/3300/2016  
CIF: RO36421140  
Adresa: Strada Apusului nr 3 ( primul  
sens giratoriu Tehodor Pallady-  
Autostrada Soarelui), Catelu, Ilfov  
Banca: BRD  
IBAN: RO34BRDE441SV13182234410

	<p><b>WAGO 2-CONDUCTOR FEMALE CONNECTOR; 1.5 MM<sup>2</sup>; 8-POLE; 1.50 MM<sup>2</sup>; GRAY, GREEN-YELLOW</b></p> <p>Ratings per: IEC/EN 61984; Tensiune nominala (III/3): 500; V Tensiune nominala de supratensiune (III/3): 6; kV Curent nominal: 13,5; A Legend (ratings): (III / 3) <sup>â%</sup>™ Overvoltage category III / Pollution degree 3; Tensiune nominala UL (Use Group B): 300; V Curent nominal UL (Use Group B): 15; A Tensiune nominala UL (Use Group C): 300; V Curent nominal UL (Use Group C): 15; A Tensiune nominala UL (Use Group D): 300; V Curent nominal UL (Use Group D): 15; A Certificari: UL 1059; Tehnologie conexiune: Push-in CAGE CLAMP®; Tip actionare: Open Tool Slot; Push-in; Connectable conductor materials: Copper; Nominal cross-section: 1 mm<sup>2</sup>; Solid conductor: 0.14 ... 1.5 mm<sup>2</sup> / 24 ... 16 AWG; Solid conductor; push-in termination: 0.5 ... 1.5 mm<sup>2</sup> / 20 ... 16 AWG; Fine-stranded conductor: 0.14 ... 1.5 mm<sup>2</sup> / 24 ... 16 AWG; Fine-stranded conductor; with insulated ferrule: 0.5 ... 0.75 mm<sup>2</sup> / 20 ... 18 AWG; Fine-stranded conductor; with ferrule; push-in termination: 0.5 ... 0.75 mm<sup>2</sup> / 20 ... 18 AWG; Strip length: 9 ... 11 mm / 0.35 ... 0.43 inch; Numar poli: 8; Numar total de conexiuni: 16; Total number of potentials: 8; Wiring type: Front-entry wiring; Note (conductor cross-section): Depending on the conductor characteristic, a conductor with a smaller cross section can also be inserted via push-in termination.; Latime: 28.7 mm / 1.13 inch; Inaltime: 40.5 mm / 1.594 inch; Adancime: 25 mm / 0.984 inch; Module Latime: 3.5 mm / 0.138 inch; Marking level: Side marking; Tip contact (pluggable connector): Conector mama/priza; Connector (connection type): for conductors; Culoare: gray, green-yellow; Material izolator: Polyamide 66 (PA 66); Fire load: 0,368; MJ Greutate: 22; g Product Group: 18 (X-COM-System); Tip ambalare: BOX; Tara de origine: DE; GTIN: 4050821091394; Customs tariff number: 85366990990; Pret: 69,79 lei (TVA inclus)</p> <p>Detalii online: <a href="https://www.materialelectrice.ro/2-conductor-female-connector-1-5-mm2-8-pole-1-50-mm2-gray-green-yellow-150189">https://www.materialelectrice.ro/2-conductor-female-connector-1-5-mm2-8-pole-1-50-mm2-gray-green-yellow-150189</a></p>
---	---