


Furnizor: **Sc Trivolt Distribution SRL**
 Reg. com.: J23/3300/2016
 CIF: RO36421140
 Adresa: Strada Apusului nr 3 (primul
 sens giratoriu Tehodor Pallady-
 Autostrada Soarelui), Catelu, Ilfov
 Banca: BRD
 IBAN: RO34BRDE441SV13182234410

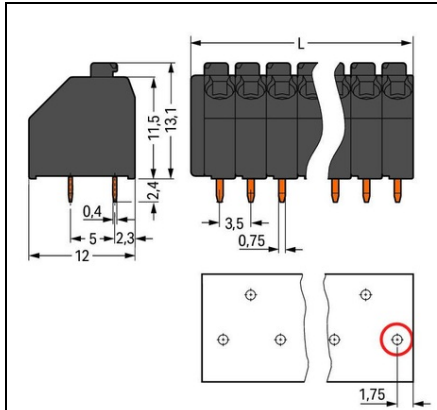

**WAGO THR PCB TERMINAL BLOCK; PUSH-BUTTON; 1.5 MM²; PIN
 SPACING 3.5 MM; 4-POLE; PUSH-IN CAGE CLAMP®; IN TAPE-AND-
 REEL PACKAGING; 1,50 MM²; BLACK**

Ratings per: IEC/EN 60664-1;
 Tensiune nominala (III/3): 200; V
 Tensiune nominala de supratensiune (III/3): 4; kV
 Tensiune nominala (III/2): 320; V
 Tensiune nominala de supratensiune (III/2): 4; kV
 Tensiune nominala (II/2): 320; V
 Tensiune nominala de supratensiune (II/2): 4; kV
 Curent nominal: 8; A
 Legend (ratings): (III / 2) $\hat{\%}$ ™ Overvoltage category III / Pollution degree 2;
 Tensiune nominala UL (Use Group B): 300; V
 Curent nominal UL (Use Group B): 8; A
 Tensiune nominala UL (Use Group D): 300; V
 Curent nominal UL (Use Group D): 5; A
 Certificari: UL 1059;
 Tensiune nominala CSA (Use Group B): 300; V
 Curent nominal CSA (Use Group B): 10; A
 Tensiune nominala CSA (Use Group D): 300; V
 Curent nominal CSA (Use Group D): 10; A
 Tehnologie conexiune: Push-in CAGE CLAMP®;
 Tip actionare: Push-button;
 Solid conductor: 0,2 ... 1,5 mm² / 24 ... 16 AWG;
 Fine-stranded conductor: 0,2 ... 1,5 mm² / 24 ... 16 AWG;
 Fine-stranded conductor; with insulated ferrule: 0,25 ... 1 mm²;
 Fine-stranded conductor; with uninsulated ferrule: 0,25 ... 1 mm²;
 Strip length: 8,5 ... 9,5 mm / 0.33 ... 0.37 inch;
 Conductor connection direction to PCB: 45; °
 Numar poli: 4;
 Numar total de conexiuni: 4;
 Total number of potentials: 4;
 Numar tipuri de conexiuni: 1;
 Numar nivele: 1;
 Distanta intre pini: 3,5 mm / 0.138 inch;
 Latime: 15,5 mm / 0.61 inch;
 Inaltime: 15,5 mm / 0.61 inch;
 Inaltime de la fata: 13,1 mm / 0.516 inch;
 Adancime: 12 mm / 0.472 inch;
 Lungimea pinului de contact: 2,4; mm
 Solder pin dimensions: 0,4 x 0,75 mm;
 Diametru placat prin gaura (THR): 1 (+0,1) mm;
 Reel diameter of tape-and-reel packaging: 330; mm
 Tape Latime: 32; mm
 PCB contact: THR;
 Solder pin arrangement: over the entire terminal strip (staggered);
 Number of solder pins per potential: 1;
 Culoare: black;
 Material group: III a;
 Material izolator: Polyamide 46 (PA 46);
 Flammability class per UL94: V2;
 Clamping spring material: Copper alloy;
 Contact material: Cupru electrolitic (ECu);
 Contact plating: tin-plated;
 Greutate: 2,1; g
 Temperatura lucru: -60 ... +115 °C;
 Tip ambalare: BOX;
 Tara de origine: DE;
 GTIN: 4045454916299;
 Customs tariff number: 85369010000;
 Pret: 7,70 lei (TVA inclus)

Detalii online: <https://www.materialelectrice.ro/thr-pcb-terminal-block-push-button-1-5-mm2-pin-spacing-3-5-mm-4-pole-push-in-cage-clamp-in-tape-and-reel-packaging-1-50-mm2-black-150357>