


Furnizor: **Sc Trivolt Distribution SRL**
 Reg. com.: J23/3300/2016
 CIF: RO36421140
 Adresa: Strada Apusului nr 3 (primul
 sens giratoriu Tehodor Pallady-
 Autostrada Soarelui), Catelu, Ilfov
 Banca: BRD
 IBAN: RO34BRDE441SV13182234410

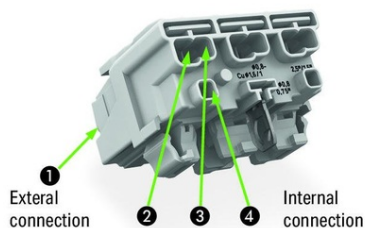

**WAGO LIGHTING CONNECTOR; PUSH-BUTTON, EXTERNAL; FOR
 LINECTĂ®; WITH SCREW-TYPE GROUND CONTACT; L3-L2-L1-PE-N;
 5-POLE; COD. A; LIGHTING SIDE: FOR SOLID CONDUCTORS; INST.
 SIDE: FOR ALL CONDUCTOR TYPES; MAX. 2.5 MM²; SURROUNDING
 AIR TEMPERATURE: MAX 85Å°C (T85); 2,5**

Ratings per: IEC/EN 60998-1;
 Ratings (note): Connection points;
 Tensiune nominala (II/2): 500; V
 Tensiune nominala de supratensiune (II/2): 4; kV
 Curent nominal: 24; A
 Ratings per: IEC/EN 60998-2-2;
 Ratings (note) 2: Connection points;
 Tensiune nominala (II/2) 2: 500; V
 Tensiune nominala de supratensiune (II/2) 2: 4; kV
 Curent nominal 2: 24; A
 Ratings per (3): IEC/EN 61984;
 Ratings (note) 3: Linect® plug-in connection;
 Tensiune nominala (II/2) 3: 500; V
 Tensiune nominala de supratensiune (II/2) (3): 4; kV
 Curent nominal 3: 16; A
 Legend (ratings): (III / 2) %™ Overvoltage category III / Pollution degree 2;
 Certificari: UL 1059;
 Connection type (1): External 1;
 Tehnologie conexiune: Push-in CAGE CLAMP®;
 Number of connection points (connection type): 2;
 Tip actionare: Push-button;
 Tip actionare 2: Push-in;
 Solid conductor: 0,5 ... 2,5 mm² / 18 ... 12 AWG;
 Solid conductor; push-in termination: 0,5 ... 2,5 mm² / 18 ... 12 AWG;
 Stranded conductor: 0,5 ... 2,5 mm² / 18 ... 14 AWG;
 Fine-stranded conductor: 0,5 ... 2,5 mm² / 18 ... 14 AWG;
 Fine-stranded conductor; with insulated ferrule: 0,5 ... 1,5 mm² / 18 ... 16 AWG;
 Fine-stranded conductor; with uninsulated ferrule: 0,5 ... 1,5 mm² / 18 ... 16 AWG;
 Fine-stranded conductor; with ferrule; push-in termination: 0,5 mm² / 18 AWG;
 Strip length: 8 ... 9 mm / 0.31 ... 0.35 inch;
 Numar poli: 5;
 Connection type 2: Internal 2;
 Tehnologie conexiune 2: PUSH WIRE®;
 Number of connection points: 1;
 Solid conductor 2: 0,5 ... 2,5 mm² / 18 ... 14 AWG;
 Fine-stranded conductor; with insulated ferrule 2: 0,5 ... 1 mm² / 18 ... 14 AWG;
 Fine-stranded conductor; with uninsulated ferrule 2: 0,5 ... 1,5 mm² / 18 ... 16 AWG;
 Strip length 2: 8 ... 9 mm / 0.31 ... 0.35 inch;
 Connection type (3): Internal 3;
 Tehnologie conexiune 3: PUSH WIRE®;
 Number of connection points: 1;
 Tip actionare 3: Push-in;
 Solid conductor 3: 0,5 ... 1,5 mm² / 18 ... 16 AWG;
 Fine-stranded conductor; with insulated ferrule 3: 0,5 ... 0,75 mm² / 18 AWG 0.5 ...
 0.75mm² / 18 AWG;
 Fine-stranded conductor; with uninsulated ferrule 3: 0,5 ... 1 mm² / 18 ... 14 AWG;
 Strip length 3: 8 ... 9 mm / 0.31 ... 0.35 inch;
 Connection type (4): Internal 4;
 Tehnologie conexiune 4: PUSH WIRE®;
 Number of connection points: 1;
 Tip actionare 4: Push-in;
 Solid conductor 4: 0,5 ... 0,75 mm² / 18 AWG;
 Strip length (4): 8 ... 9 mm / 0.31 ... 0.35 inch;
 Total number of potentials: 5;
 Numar tipuri de conexiuni: 4;
 Ground function: with screw-type ground contact;
 Distanta intre pini: 10 mm / 0.394 inch;
 Latime: 50 mm / 1.969 inch;
 Inaltime: 22,4 mm / 0.882 inch;
 Inaltime de la fata: 17 mm / 0.669 inch;
 Adancime: 27,3 mm / 1.075 inch;
 Tehnologie: Linect;
 Marking: L3 L2 L1 as N;
 Culoare: white;
 Material group: III a;
 Material izolator: Polycarbonate (PC);
 Flammability class per UL94: V0;
 Clamping spring material: Chrome nickel spring steel (CrNi);
 Contact material: Cupru electrolitic (ECu);
 Contact plating: tin-plated;
 Fire load: 0,33; MJ
 Greutate: 16,8; g

Temperature stability: 120; °C
T marking: T85;
Product Group: 8 (Misc. Chassis Mount Blocks);
Tip ambalare: bag;
Tara de origine: PL;
GTIN: 4050821487081;
Customs tariff number: 85369010000;
Pret: 7,94 lei (TVA inclus)

Detalii online: <https://www.materialelectrice.ro/lighting-connector-push-button-external-for-linect-with-screw-type-ground-contact-13-12-11-pe-n-5-pole-cod-a-lighting-side-for-solid-conductors-inst-side-for-all-conductor-types-max-2-5-mm2-surrounding-air-temperature-max-850c-t85-2-50-mm2-white-150512>