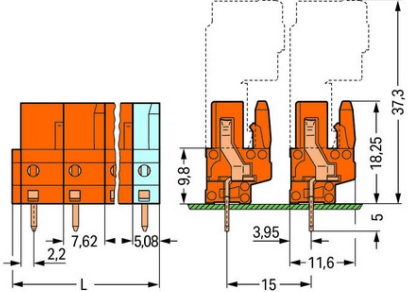


Furnizor: **Sc Trivolt Distribution SRL**
Reg. com.: J23/3300/2016
CIF: RO36421140
Adresa: Strada Apusului nr 3 (primul
sens giratoriu Tehodor Pallady-
Autostrada Soarelui), Catelu, Ilfov
Banca: BRD
IBAN: RO34BRDE441SV13182234410

 <p>The drawing shows a 3-pole WAGO THT female header. It includes a side view and a top view. Dimensions are provided in millimeters: pin spacing is 7.62 mm, pin diameter is 2.2 mm, pin length is 5.08 mm, and the distance between the first and last pins is L. The top view shows a total width of 15 mm, with a 3.95 mm offset from the center to the first pin. The side view shows a total height of 37.3 mm, with a 9.8 mm offset from the top to the first pin, a 5 mm offset from the bottom to the first pin, and a 11.6 mm offset from the center to the first pin. The header has three poles, each with a contact tip.</p>	<p>WAGO THT FEMALE HEADER; 0.6 X 1.0 MM SOLDER PIN; STRAIGHT; PIN SPACING 7.62 MM; 3-POLE; ORANGE</p> <p>Ratings per: IEC/EN 60664-1; Tensiune nominala (III/3): 500; V Tensiune nominala de supratensiune (III/3): 6; kV Tensiune nominala (III/2): 630; V Tensiune nominala de supratensiune (III/2): 6; kV Tensiune nominala (II/2): 1000; V Tensiune nominala de supratensiune (II/2): 6; kV Curent nominal: 12; A Legend (ratings): (III / 2) \hat{a}%™ Overvoltage category III / Pollution degree 2; Tensiune nominala UL (Use Group B): 300; V Curent nominal UL (Use Group B): 15; A Tensiune nominala UL (Use Group D): 300; V Curent nominal UL (Use Group D): 10; A Certificari: UL 1059; Tensiune nominala UL 1977: 600; V Curent nominal UL 1977: 15; A Tensiune nominala CSA (Use Group B): 300; V Curent nominal CSA (Use Group B): 15; A Tensiune nominala CSA (Use Group D): 300; V Curent nominal CSA (Use Group D): 10; A Numar poli: 3; Total number of potentials: 3; Numar tipuri de conexiuni: 1; Numar nivele: 1; Distanta intre pini: 7,62 mm / 0.3 inch; Latime: 21,82 mm / 0.859 inch; Inaltime: 23,25 mm / 0.915 inch; Inaltime de la fata: 18,25 mm / 0.719 inch; Adancime: 11,6 mm / 0.457 inch; Lungimea pinului de contact: 5; mm Solder pin dimensions: 0,6 x 1 mm; Diametrul de gaurire cu toleranta: 1,3 (+0,1) mm; Tip contact (pluggable connector): Conector mama/priza; Connector (connection type): for PCB; Mismating protection: No; Mating direction to the PCB: 90; ° PCB contact: THT; Solder pin arrangement: over the entire female connector (in-line); Number of solder pins per potential: 1; Culoare: orange; Material group: I; Material izolator: Polyamide 66 (PA 66); Flammability class per UL94: V0; Contact material: Copper alloy; Contact plating: tin-plated; Fire load: 0,062; MJ Greutate: 3,2; g Temperatura lucru: -60 ... +85 °C; Product Group: 3 (Multi Conn. System); Tip ambalare: BOX; Tara de origine: DE; GTIN: 4044918579926; Customs tariff number: 85366990990; Pret: 9,50 lei (TVA inclus)</p> <p>Detalii online: https://www.materialelectrice.ro/tht-female-header-0-6-x-1-0-mm-solder-pin-straight-pin-spacing-7-62-mm-3-pole-orange-150662</p>
---	---