


Furnizor: **Sc Trivolt Distribution SRL**  
Reg. com.: J23/3300/2016  
CIF: RO36421140  
Adresa: Strada Apusului nr 3 ( primul  
sens giratoriu Tehodor Pallady-  
Autostrada Soarelui), Catelu, Ilfov  
Banca: BRD  
IBAN: RO34BRDE441SV13182234410

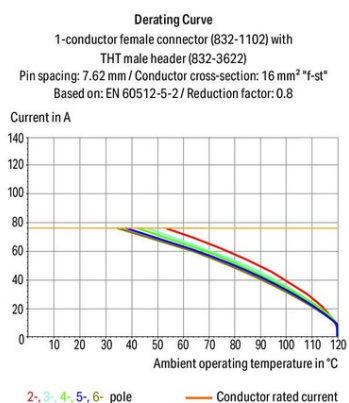

**WAGO 1-CONDUCTOR FEMALE PLUG; 100% PROTECTED AGAINST  
MISMATING; LEVER; SILVER-PLATED CONTACTS; 16 MM<sup>2</sup>; PIN  
SPACING 10.16 MM; 3-POLE; 16,00 MM<sup>2</sup>; LIGHT GRAY**

Ratings per: IEC/EN 60664-1;  
Tensiune nominala (III/3): 1000; V  
Tensiune nominala de supratensiune (III/3): 8; kV  
Tensiune nominala (III/2): 1000; V  
Tensiune nominala de supratensiune (III/2): 8; kV  
Tensiune nominala (II/2): 1000; V  
Tensiune nominala de supratensiune (II/2): 8; kV  
Curent nominal: 76; A  
Legend (ratings): (III / 2) %<sup>o</sup>™ Overvoltage category III / Pollution degree 2;  
Tensiune nominala UL (Use Group B): 600; V  
Curent nominal UL (Use Group B): 66; A  
Tensiune nominala UL (Use Group C): 600; V  
Curent nominal UL (Use Group C): 66; A  
Certificari: UL 1059;  
Tensiune nominala CSA (Use Group B): 600; V  
Curent nominal CSA (Use Group B): 66; A  
Tensiune nominala CSA (Use Group C): 600; V  
Curent nominal CSA (Use Group C): 66; A  
Tehnologie conexiune: Push-in CAGE CLAMP®;  
Tip actionare: Lever;  
Solid conductor: 0,75 ... 16 mm<sup>2</sup> / 18 ... 4 AWG;  
Fine-stranded conductor: 0,75 ... 25 mm<sup>2</sup> / 18 ... 4 AWG;  
Fine-stranded conductor; with insulated ferrule: 0,75 ... 16 mm<sup>2</sup>;  
Fine-stranded conductor; with uninsulated ferrule: 0,75 ... 16 mm<sup>2</sup>;  
Strip length: 18 ... 20 mm / 0.71 ... 0.79 inch;  
Numar poli: 3;  
Numar total de conexiuni: 3;  
Total number of potentials: 3;  
Numar tipuri de conexiuni: 1;  
Numar nivele: 1;  
Distanta intre pini: 10,16 mm / 0.4 inch;  
Latime: 31,78 mm / 1.251 inch;  
Inaltime: 29,1 mm / 1.146 inch;  
Adancime: 49,8 mm / 1.961 inch;  
Tip contact (pluggable connector): Conector mama/priza;  
Connector (connection type): for conductor;  
Mismating protection: Yes;  
Culoare: light gray;  
Material group: I;  
Material izolator: Polybutylene terephthalate (PBT);  
Flammability class per UL94: V0;  
Clamping spring material: Chrome nickel spring steel (CrNi);  
Material of the additional spring for socket contact: Chrome nickel spring steel (CrNi);  
Contact material: Cupru electrolitic (ECu);  
Contact plating: silver-plated;  
Greutate: 40,9; g  
Temperatura lucru: -60 ... +120 °C;  
Tip ambalare: BOX;  
Tara de origine: DE;  
GTIN: 4055143921169;  
Customs tariff number: 85366990990;  
Pret: 47,22 lei (TVA inclus)

Detalii online: <https://www.materialelectrice.ro/1-conductor-female-plug-100-protected-against-mismating-lever-silver-plated-contacts-16-mm2-pin-spacing-10-16-mm-3-pole-16-00-mm2-light-gray-150715>