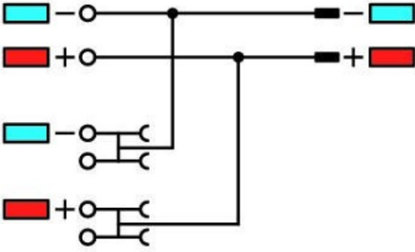


Furnizor: **Sc Trivolt Distribution SRL**  
Reg. com.: J23/3300/2016  
CIF: RO36421140  
Adresa: Strada Apusului nr 3 ( primul  
sens giratoriu Tehodor Pallady-  
Autostrada Soarelui), Catelu, Ilfov  
Banca: BRD  
IBAN: RO34BRDE441SV13182234410

	<p><b>WAGO 3-CONDUCTOR SENSOR SUPPLY TERMINAL BLOCK; FOR PNP (POSITIVE) SWITCHING SENSORS; 1 MM<sup>2</sup>; PUSH-IN CAGE CLAMP®; 1,00 MM<sup>2</sup>; ORANGE</b></p> <p>Ratings per: IEC/EN 60947-7-1; Tensiune nominala (III/3): 250; V Tensiune nominala de supratensiune (III/3): 4; kV Curent nominal: 13,5; A Legend (ratings): (III / 3) %™ Overvoltage category III / Pollution degree 3; Tensiune nominala UL (Use Group B): 300; V Curent nominal UL (Use Group B): 15; A Tensiune nominala UL (Use Group C): 300; V Curent nominal UL (Use Group C): 15; A Tensiune nominala UL (Use Group D): 300; V Curent nominal UL (Use Group D): 15; A Certificari: UL 1059; Tensiune nominala CSA (Use Group C): 300; V Curent nominal CSA (Use Group C): 10; A Tehnologie conexiune: Push-in CAGE CLAMP®; Tip actionare: Push-in; Open Tool Slot; Connectable conductor materials: Copper; Nominal cross-section: 1 mm<sup>2</sup>; Solid conductor: 0,14 ... 1,5 mm<sup>2</sup> / 24 ... 16 AWG; Solid conductor; push-in termination: 0,5 ... 1,5 mm<sup>2</sup> / 20 ... 16 AWG; Fine-stranded conductor: 0,14 ... 1,5 mm<sup>2</sup> / 24 ... 16 AWG; Fine-stranded conductor; with insulated ferrule: 0,5 ... 0,75 mm<sup>2</sup> / 20 ... 18 AWG; Fine-stranded conductor; with ferrule; push-in termination: 0,5 ... 0,75 mm<sup>2</sup> / 20 ... 18 AWG; Strip length: 9 ... 11 mm / 0.35 ... 0.43 inch; Numar total de conexiuni: 6; Total number of potentials: 4; Wiring type: Front-entry wiring; Note (conductor cross-section): Depending on the conductor characteristic, a conductor with a smaller cross-section can also be inserted via push-in termination.; Latime: 7 mm / 0.276 inch; Inaltime from upper-edge of DIN-rail: 52,4 mm / 2.063 inch; Adancime: 81,1 mm / 3.193 inch; Design: horizontal type; Tip montaj: DIN-35 rail; Marking level: Center/side marking; Culoare: orange; Material izolator: Polyamide 66 (PA 66); Greutate: 15,9; g Tip ambalare: BOX; Tara de origine: DE; GTIN: 4055143523820; Customs tariff number: 85369010000; Pret: 34,28 lei (TVA inclus)</p> <p>Detalii online: <a href="https://www.materialelectrice.ro/3-conductor-sensor-supply-terminal-block-for-pnp-positive-switching-sensors-1-mm2-push-in-cage-clamp-1-00-mm2-orange-150717">https://www.materialelectrice.ro/3-conductor-sensor-supply-terminal-block-for-pnp-positive-switching-sensors-1-mm2-push-in-cage-clamp-1-00-mm2-orange-150717</a></p>
---	---