


Furnizor: **Sc Trivolt Distribution SRL**  
 Reg. com.: J23/3300/2016  
 CIF: RO36421140  
 Adresa: Strada Apusului nr 3 ( primul  
 sens giratoriu Tehodor Pallady-  
 Autostrada Soarelui), Catelu, Ilfov  
 Banca: BRD  
 IBAN: RO34BRDE441SV13182234410

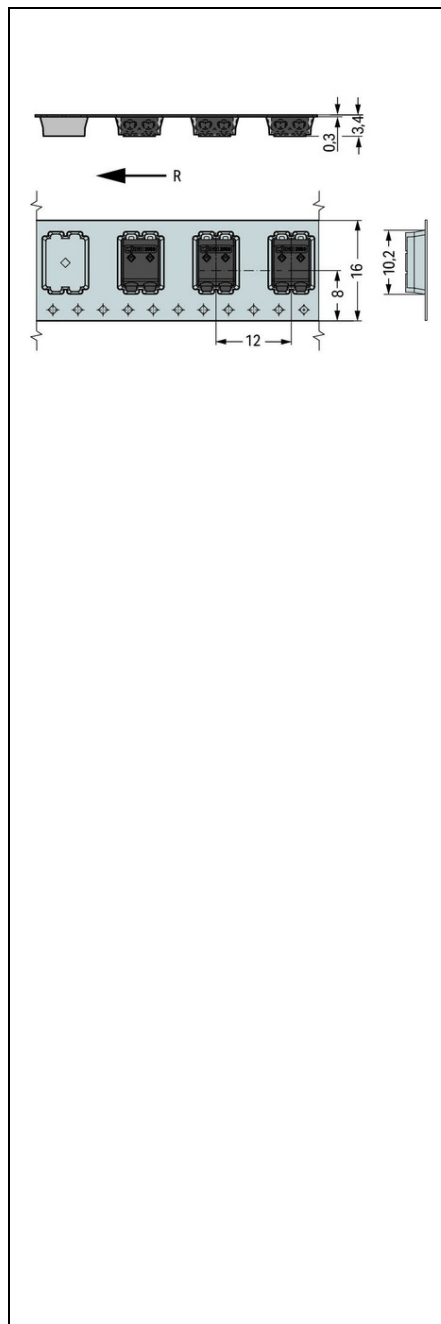

**WAGO SMD PCB TERMINAL BLOCK; 0.5 MM<sup>2</sup>; PIN SPACING 3 MM;  
 2-POLE; PUSH WIRE<sup>®</sup>; IN TAPE-AND-REEL PACKAGING; 0,50  
 MM<sup>2</sup>; BLACK**

Ratings per: IEC/EN 60664-1;  
 Tensiune nominala (III/3): 63; V  
 Tensiune nominala de supratensiune (III/3): 2,5; kV  
 Tensiune nominala (III/2): 160; V  
 Tensiune nominala de supratensiune (III/2): 2,5; kV  
 Tensiune nominala (II/2): 320; V  
 Tensiune nominala de supratensiune (II/2): 2,5; kV  
 Curent nominal: 3; A  
 Legend (ratings): (III / 2)  $\hat{=}$  Overvoltage category III / Pollution degree 2;  
 Certificari: UL 1059;  
 Tensiune nominala UL 1977: 250; V  
 Curent nominal UL 1977: 3; A  
 Tehnologie conexiune: PUSH WIRE<sup>®</sup>;  
 Tip actionare: Operating tool;  
 Solid conductor: 0,14 ... 0,34 mm<sup>2</sup> / 26 ... 22 AWG;  
 Strip length: 4 ... 5,5 mm / 0.16 ... 0.22 inch;  
 Conductor connection direction to PCB: 0; °  
 Numar poli: 2;  
 Solid conductor 2: 0,5 mm<sup>2</sup> / 20 AWG;  
 Note (conductor cross-section) 2: No reconnection of smaller conductor cross-sections  
 (0.5 mm<sup>2</sup>/20 AWG);  
 Strip length 2: 6 ... 7,5 mm / 0.24 ... 0.3 inch;  
 Numar total de conexiuni: 2;  
 Total number of potentials: 2;  
 Numar tipuri de conexiuni: 1;  
 Numar nivele: 1;  
 Note (conductor cross-section): For conductors (26 AWG) that are not rigid enough, the  
 clamping unit must be opened using an operating tool.;  
 Distanta intre pini: 3 mm / 0.118 inch;  
 Latime: 5,9 mm / 0.232 inch;  
 Inaltime: 2,7 mm / 0.106 inch;  
 Adancime: 7,9 mm / 0.311 inch;  
 Reel diameter of tape-and-reel packaging: 330; mm  
 Tape Latime: 16; mm  
 PCB contact: SMD;  
 Culoare: black;  
 Material group: I;  
 Material izolator: Polyphthalamide (PPA GF);  
 Flammability class per UL94: V0;  
 Clamping spring material: Chrome nickel spring steel (CrNi);  
 Contact material: Copper alloy;  
 Contact plating: tin-plated;  
 Fire load: 0,002; MJ  
 Greutate: 0,2; g  
 Temperatura lucru: -60 ... +105 °C;  
 Tip ambalare: BOX;  
 Tara de origine: CH;  
 GTIN: 4055143476560;  
 Customs tariff number: 85369010000;  
 Pret: 2,63 lei (TVA inclus)

Detalii online: <https://www.materialeelectrice.ro/smd-pcb-terminal-block-0-5-mm2-pin-spacing-3-mm-2-pole-push-wire-in-tape-and-reel-packaging-0-50-mm2-black-150823>