


Furnizor: **Sc Trivolt Distribution SRL**
Reg. com.: J23/3300/2016
CIF: RO36421140
Adresa: Strada Apusului nr 3 (primul
sens giratoriu Tehodor Pallady-
Autostrada Soarelui), Catelu, Ilfov
Banca: BRD
IBAN: RO34BRDE441SV13182234410

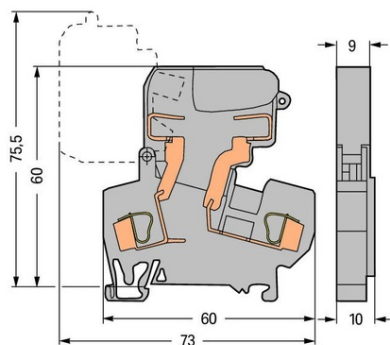

WAGO 2-CONDUCTOR FUSE TERMINAL BLOCK; WITH PIVOTING FUSE HOLDER; AND END PLATE; FOR 5 X 20 MM MINIATURE METRIC FUSE; WITHOUT BLOWN FUSE INDICATION; FOR DIN-RAIL 35 X 15 AND 35 X 7.5; 4 MM²; CAGE CLAMP[®]; 4,00 MM²; BLACK

Ratings per: IEC/EN 60947-7-3;
Tesiune nominala (III/3): 800; V
Tensiune nominala de supratensiune (III/3): 8; kV
Curent nominal: 10; A
Legend (ratings): (III / 3) \hat{a} %[™] Overvoltage category III / Pollution degree 3;
Tehnologie conexiune: CAGE CLAMP[®];
Tip actionare: Operating tool;
Connectable conductor materials: Copper; Aluminum;
Solid conductor: 0,08 ... 4 mm² / 28 ... 12 AWG;
Fine-stranded conductor: 0,08 ... 4 mm² / 28 ... 12 AWG;
Strip length: 9 ... 10 mm / 0.35 ... 0.39 inch;
Numar total de conexiuni: 2;
Total number of potentials: 2;
Numar nivele: 1;
Wiring type: Front-entry wiring;
Latime: 10 mm / 0.394 inch;
Inaltime from upper-edge of DIN-rail: 60 mm / 2.362 inch;
Adancime: 60 mm / 2.362 inch;
Design: angled;
Tip montaj: DIN-35 rail;
Marking level: Center marking;
Culoare: black;
Material izolator: Polyamide 66 (PA 66);
Fire load: 0,326; MJ
Greutate: 17,2; g
Product Group: 1 (Rail Mounted Terminal Blocks);
Tip ambalare: BOX;
Tara de origine: PL;
GTIN: 4045454638627;
Customs tariff number: 85369095990;
Pret: 27,70 lei (TVA inclus)

Detalii online: <https://www.materialelectrice.ro/2-conductor-fuse-terminal-block-with-pivoting-fuse-holder-and-end-plate-for-5-x-20-mm-miniature-metric-fuse-without-blown-fuse-indication-for-din-rail-35-x-15-and-35-x-7-5-4-mm2-cage-clamp-4-00-mm2-black-150861>