


Furnizor: **Sc Trivolt Distribution SRL**
Reg. com.: J23/3300/2016
CIF: RO36421140
Adresa: Strada Apusului nr 3 (primul
sens giratoriu Tehodor Pallady-
Autostrada Soarelui), Catelu, Ilfov
Banca: BRD
IBAN: RO34BRDE441SV13182234410

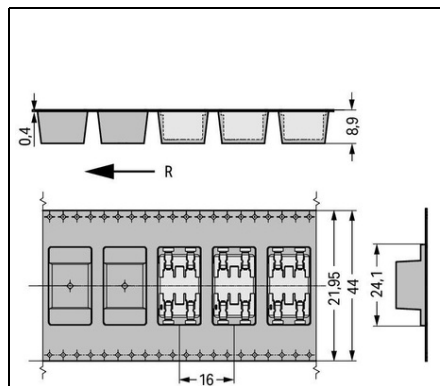

**WAGO THROUGH-BOARD SMD PCB TERMINAL BLOCK; 0.75 MM²;
PIN SPACING 6.5 MM; 2-POLE; PUSH-IN CAGE CLAMP[®]; IN TAPE-
AND-REEL PACKAGING; 0,75 MM²; WHITE**

Ratings per: IEC/EN 60664-1;
Ratings (note): Electrical data for FR4 PCB type;
Tensiune nominala (III/3): 320; V
Tensiune nominala de supratensiune (III/3): 4; kV
Tensiune nominala (III/2): 320; V
Tensiune nominala de supratensiune (III/2): 4; kV
Tensiune nominala (II/2): 630; V
Tensiune nominala de supratensiune (II/2): 4; kV
Curent nominal: 9; A
Ratings per: IEC/EN 60664-1;
Ratings (note) 2: Electrical data for metal-core PCBs;
Tensiune nominala (III/3) 2: 200; V
Tensiune nominala de supratensiune (III/3) 2: 4; kV
Tensiune nominala (III/2) 2: 320; V
Tensiune nominala de supratensiune (III/2) 2: 4; kV
Tensiune nominala (II/2) 2: 500; V
Tensiune nominala de supratensiune (II/2) 2: 4; kV
Curent nominal 2: 9; A
Legend (ratings): (III / 2) \hat{a} %[™] Overvoltage category III / Pollution degree 2;
Certificari: UL 1059;
Tensiune nominala UL 1977: 600; V
Curent nominal UL 1977: 9; A
Tehnologie conexiune: Push-in CAGE CLAMP[®];
Tip actionare: Operating tool;
Solid conductor: 0,2 ... 0,75 mm² / 24 ... 18 AWG;
Fine-stranded conductor: 0,2 ... 0,75 mm² / 24 ... 18 AWG;
Strip length: 8 ... 10 mm / 0.31 ... 0.39 inch;
Conductor connection direction to PCB: 0; °
Numar poli: 2;
Numar total de conexiuni: 2;
Total number of potentials: 2;
Numar tipuri de conexiuni: 1;
Numar nivele: 1;
Distanta intre pini: 6,5 mm / 0.256 inch;
Latime: 11,8 mm / 0.465 inch;
Inaltime: 7,45 mm / 0.293 inch;
Adancime: 22,2 mm / 0.874 inch;
Reel diameter of tape-and-reel packaging: 330; mm
Tape Latime: 44; mm
Design: with Cover;
Tip montaj: Through-board;
Marking: + -;
PCB contact: SMD;
Culoare: white;
Material group: I;
Material izolator: Polyphthalamide (PPA GF);
Flammability class per UL94: V0;
Clamping spring material: Chrome nickel spring steel (CrNi);
Contact material: Copper alloy;
Contact plating: tin-plated;
Greutate: 1,3; g
Temperatura lucru: -60 ... +105 °C;
Tip ambalare: BOX;
Tara de origine: CH;
GTIN: 4055143645133;
Customs tariff number: 85369010000;
Pret: 3,34 lei (TVA inclus)

Detalii online: <https://www.materialelectrice.ro/through-board-smd-pcb-terminal-block-0-75-mm2-pin-spacing-6-5-mm-2-pole-push-in-cage-clamp-in-tape-and-reel-packaging-0-75-mm2-white-151062>