


Furnizor: **Sc Trivolt Distribution SRL**
Reg. com.: J23/3300/2016
CIF: RO36421140
Adresa: Strada Apusului nr 3 (primul
sens giratoriu Tehodor Pallady-
Autostrada Soarelui), Catelu, Ilfov
Banca: BRD
IBAN: RO34BRDE441SV13182234410

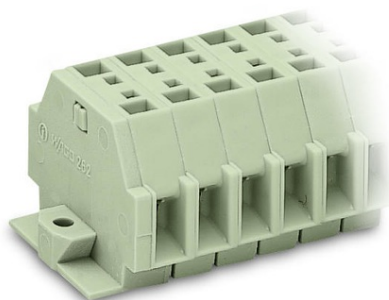

WAGO 2-CONDUCTOR TERMINAL STRIP; SUITABLE FOR EX E II APPLICATIONS; 2-POLE; WITHOUT PUSH-BUTTONS; WITH SNAP-IN MOUNTING FEET; FOR PLATE THICKNESS 0.6 - 1.2 MM; FIXING HOLE 3.5 MM $\tilde{\text{A}}$; 4 MM $\tilde{\text{A}}$; CAGE CLAMP $\tilde{\text{A}}$; 4,00 MM $\tilde{\text{A}}$; LIGHT GRAY

Tensiune nominala EN (Ex e II): 550; V
Curent nominal (Ex e II): 23; A
Tehnologie conexiune: CAGE CLAMP $\tilde{\text{A}}$;
Tip actionare: Operating tool;
Connectable conductor materials: Copper;
Solid conductor: 0,5 ... 4 mm $\tilde{\text{A}}$ / 20 ... 12 AWG;
Fine-stranded conductor: 0,5 ... 4 mm $\tilde{\text{A}}$ / 20 ... 12 AWG;
Strip length: 9 ... 10 mm / 0.35 ... 0.39 inch;
Numar poli: 2;
Numar total de conexiuni: 4;
Total number of potentials: 2;
Numar nivele: 1;
Wiring type: Side-entry wiring;
Latime: 18,4 mm / 0.724 inch;
Inaltime de la fata: 23 mm / 0.906 inch;
Adancime: 33,5 mm / 1.319 inch;
Module Latime: 7 mm / 0.276 inch;
Design: horizontal type;
Tip montaj: Snap-in mounting foot;
Marking level: Side marking;
Culoare: light gray;
Fire load: 0,204; MJ
Greutate: 9,6; g
Tip ambalare: BOX;
Tara de origine: DE;
GTIN: 4044918642019;
Customs tariff number: 85369010000;
Pret: 9,02 lei (TVA inclus)

Detalii online: <https://www.materialelectrice.ro/2-conductor-terminal-strip-suitable-for-ex-e-ii-applications-2-pole-without-push-buttons-with-snap-in-mounting-feet-for-plate-thickness-0-6-1-2-mm-fixing-hole-3-5-mm-oe-4-mm2-cage-clamp-4-00-mm2-light-gray-151875>