


Furnizor: **Sc Trivolt Distribution SRL**
 Reg. com.: J23/3300/2016
 CIF: RO36421140
 Adresa: Strada Apusului nr 3 (primul
 sens giratoriu Tehodor Pallady-
 Autostrada Soarelui), Catelu, Ilfov
 Banca: BRD
 IBAN: RO34BRDE441SV13182234410

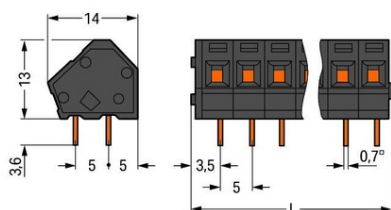

**WAGO THR PCB TERMINAL BLOCK; 2.5 MM²; PIN SPACING 5 MM;
 5-POLE; CAGE CLAMP[®]; IN TAPE-AND-REEL PACKAGING;
 COMMONING OPTION; 2,50 MM²; BLACK**

Ratings per: IEC/EN 60664-1;
 Tensiune nominala (III/3): 200; V
 Tensiune nominala de supratensiune (III/3): 4; kV
 Tensiune nominala (III/2): 320; V
 Tensiune nominala de supratensiune (III/2): 4; kV
 Tensiune nominala (II/2): 320; V
 Tensiune nominala de supratensiune (II/2): 4; kV
 Curent nominal: 24; A
 Legend (ratings): (III / 2) \hat{a} %TM Overvoltage category III / Pollution degree 2;
 Tensiune nominala UL (Use Group B): 300; V
 Curent nominal UL (Use Group B): 15; A
 Tensiune nominala UL (Use Group D): 300; V
 Curent nominal UL (Use Group D): 10; A
 Certificari: UL 1059;
 Tensiune nominala CSA (Use Group B): 300; V
 Curent nominal CSA (Use Group B): 15; A
 Tensiune nominala CSA (Use Group D): 300; V
 Curent nominal CSA (Use Group D): 10; A
 Tehnologie conexiune: CAGE CLAMP[®];
 Tip actionare: Operating tool;
 Solid conductor: 0.08 ... 2.5 mm² / 28 ... 12 AWG;
 Fine-stranded conductor: 0.08 ... 2.5 mm² / 28 ... 12 AWG;
 Fine-stranded conductor; with insulated ferrule: 0.25 ... 1.5 mm²;
 Fine-stranded conductor; with uninsulated ferrule: 0.25 ... 1.5 mm²;
 Strip length: 5 ... 6 mm / 0.2 ... 0.24 inch;
 Conductor connection direction to PCB: 45; °
 Numar poli: 5;
 Numar total de conexiuni: 5;
 Total number of potentials: 5;
 Numar tipuri de conexiuni: 1;
 Numar nivele: 1;
 Note (conductor cross-section): 12 AWG: THHN, THWN;
 Distanta intre pini: 5 mm / 0.197 inch;
 Latime: 27.3 mm / 1.075 inch;
 Inaltime: 16.6 mm / 0.654 inch;
 Inaltime de la fata: 13 mm / 0.512 inch;
 Adancime: 14 mm / 0.551 inch;
 Lungimea pinului de contact: 3,6; mm
 Solder pin dimensions: 0.7 x 0.7 mm;
 Diametru placat prin gaura (THR): 1.1 (+0.1) mm;
 Reel diameter of tape-and-reel packaging: 330; mm
 Tape Latime: 44; mm
 PCB contact: THR;
 Solder pin arrangement: over the entire terminal strip, in line;
 Number of solder pins per potential: 2;
 Culoare: black;
 Material group: III a;
 Material izolator: Polyamide 46 (PA 46);
 Flammability class per UL94: V2;
 Clamping spring material: Chrome nickel spring steel (CrNi);
 Contact material: Cupru electrolitic(ECu);
 Contact plating: tin-plated;
 Greutate: 4,6; g
 Temperatura lucru: -60 ... +115 °C;
 Tip ambalare: BOX;
 Tara de origine: DE;
 GTIN: 4055143289924;
 Customs tariff number: 85369010000;
 Pret: 10,99 lei (TVA inclus)

Detalii online: <https://www.materialelectrice.ro/thr-pcb-terminal-block-2-5-mm2-pin-spacing-5-mm-5-pole-cage-clamp-in-tape-and-reel-packaging-commoning-option-2-50-mm2-black-151884>