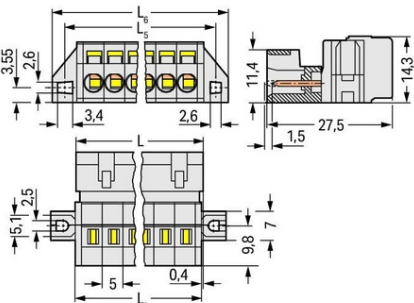


Furnizor: **Sc Trivolt Distribution SRL**  
Reg. com.: J23/3300/2016  
CIF: RO36421140  
Adresa: Strada Apusului nr 3 ( primul  
sens giratoriu Tehodor Pallady-  
Autostrada Soarelui), Catelu, Ilfov  
Banca: BRD  
IBAN: RO34BRDE441SV13182234410

	<p align="center"><b>WAGO 1-CONDUCTOR MALE CONNECTOR; 100% PROTECTED AGAINST MISMATING; PRECEDING GROUND CONTACT; CLAMPING COLLAR; DIRECT MARKING; 2.5 MM<sup>2</sup>; PIN SPACING 5 MM; 2-POLE; 2,50 MM<sup>2</sup>; LIGHT GRAY</b></p> <p>Ratings per: IEC/EN 60664-1; Tensiune nominala (III/3): 320; V Tensiune nominala de supratensiune (III/3): 4; kV Tensiune nominala (III/2): 320; V Tensiune nominala de supratensiune (III/2): 4; kV Tensiune nominala (II/2): 630; V Tensiune nominala de supratensiune (II/2): 4; kV Curent nominal: 12; A Legend (ratings): (III / 2) <math>\hat{\%}</math>™ Overvoltage category III / Pollution degree 2; Tensiune nominala UL (Use Group B): 300; V Curent nominal UL (Use Group B): 15; A Tensiune nominala UL (Use Group D): 300; V Curent nominal UL (Use Group D): 10; A Certificari: UL 1059; Tensiune nominala UL 1977: 600; V Curent nominal UL 1977: 15; A Tensiune nominala CSA (Use Group B): 300; V Curent nominal CSA (Use Group B): 15; A Tensiune nominala CSA (Use Group D): 300; V Curent nominal CSA (Use Group D): 10; A Tehnologie conexiune: CAGE CLAMP®; Tip actionare: Operating tool; Solid conductor: 0.08 ... 2.5 mm<sup>2</sup> / 28 ... 12 AWG; Fine-stranded conductor: 0.08 ... 2.5 mm<sup>2</sup> / 28 ... 12 AWG; Fine-stranded conductor; with insulated ferrule: 0.25 ... 1.5 mm<sup>2</sup>; Fine-stranded conductor; with uninsulated ferrule: 0.25 ... 2.5 mm<sup>2</sup>; Strip length: 8 ... 9 mm / 0.31 ... 0.35 inch; Numar poli: 2; Numar total de conexiuni: 2; Total number of potentials: 2; Numar tipuri de conexiuni: 1; Numar nivele: 1; Ground function: with preceding GND contact; Conductor entry direction to mating direction: 0; ° Distanța între pini: 5 mm / 0.197 inch; Latime: 24.8 mm / 0.976 inch; Inaltime: 14.3 mm / 0.563 inch; Adancime: 27.5 mm / 1.083 inch; Tip montaj: Mounting flange; Tip montaj: Feed-through mounting; Panel mounting; Tip contact (pluggable connector): Conector tata/fisa; Connector (connection type): for conductors; Mismating protection: Yes; Culoare: light gray; Material group: I; Material izolator: Polyamide 66 (PA 66); Flammability class per UL94: V0; Clamping spring material: Chrome nickel spring steel (CrNi); Contact material: Cupru electrolitic (ECu); Contact plating: tin-plated; Fire load: 0,09; MJ Greutate: 4,3; g Temperatura lucru: -60 ... +100 °C; Product Group: 3 (Multi Conn. System); Tip ambalare: BOX; Tara de origine: DE; GTIN: 4044918284882; Customs tariff number: 85366990990; Pret: 14,13 lei (TVA inclus)</p> <p>Detalii online: <a href="https://www.materialelectrice.ro/1-conductor-male-connector-100-protected-against-mismating-preceding-ground-contact-clamping-collar-direct-marking-2-5-mm2-pin-spacing-5-mm-2-pole-2-50-mm2-light-gray-152029">https://www.materialelectrice.ro/1-conductor-male-connector-100-protected-against-mismating-preceding-ground-contact-clamping-collar-direct-marking-2-5-mm2-pin-spacing-5-mm-2-pole-2-50-mm2-light-gray-152029</a></p>
---	--