


Furnizor: **Sc Trivolt Distribution SRL**
Reg. com.: J23/3300/2016
CIF: RO36421140
Adresa: Strada Apusului nr 3 (primul
sens giratoriu Tehodor Pallady-
Autostrada Soarelui), Catelu, Ilfov
Banca: BRD
IBAN: RO34BRDE441SV13182234410

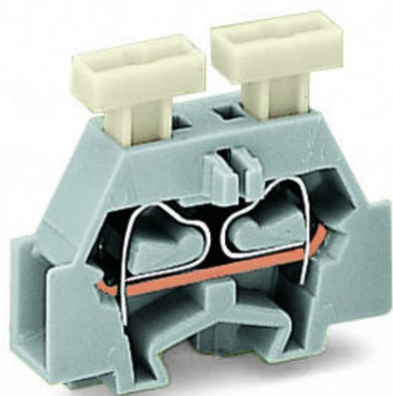

**WAGO 2-CONDUCTOR TERMINAL BLOCK; ON BOTH SIDES WITH
PUSH-BUTTON; WITH SNAP-IN MOUNTING FOOT; FOR PLATE
THICKNESS 0.6 - 1.2 MM; FIXING HOLE 3.5 MM $\tilde{\sim}$; 2.5 MM $\tilde{\sim}$ ²; CAGE
CLAMP $\tilde{\sim}$; 2,50 MM $\tilde{\sim}$ ²; GRAY**

Tensiune nominala (III/3): 500; V
Tensiune nominala de supratensiune (III/3): 6; kV
Curent nominal: 24; A
Legend (ratings): (III / 3) $\tilde{\sim}$ ™ Overvoltage category III / Pollution degree 3;
Tehnologie conexiune: CAGE CLAMP $\tilde{\sim}$;
Tip actionare: Operating tool; Push-button;
Connectable conductor materials: Copper;
Solid conductor: 0,08 ... 2,5 mm $\tilde{\sim}$ ² / 28 ... 14 AWG;
Fine-stranded conductor: 0,08 ... 2,5 mm $\tilde{\sim}$ ² / 28 ... 14 AWG;
Strip length: 8 ... 9 mm / 0.31 ... 0.35 inch;
Numar poli: 1;
Numar total de conexiuni: 2;
Total number of potentials: 1;
Numar nivele: 1;
Wiring type: Side-entry wiring;
Latime: 6 mm / 0.236 inch;
Inaltime de la fata: 23,2 mm / 0.913 inch;
Adancime: 28 mm / 1.102 inch;
Design: horizontal type;
Tip montaj: Snap-in mounting foot;
Marking level: Side marking;
Culoare: gray;
Fire load: 0,052; MJ
Greutate: 2,6; g
Tip ambalare: BOX;
Tara de origine: DE;
GTIN: 4044918624053;
Customs tariff number: 85369010000;
Pret: 2,56 lei (TVA inclus)

Detalii online: <https://www.materialelectrice.ro/2-conductor-terminal-block-on-both-sides-with-push-button-with-snap-in-mounting-foot-for-plate-thickness-0-6-1-2-mm-fixing-hole-3-5-mm-oe-2-5-mm2-cage-clamp-2-50-mm2-gray-152150>