


Furnizor: **Sc Trivolt Distribution SRL**  
Reg. com.: J23/3300/2016  
CIF: RO36421140  
Adresa: Strada Apusului nr 3 ( primul  
sens giratoriu Tehodor Pallady-  
Autostrada Soarelui), Catelu, Ilfov  
Banca: BRD  
IBAN: RO34BRDE441SV13182234410

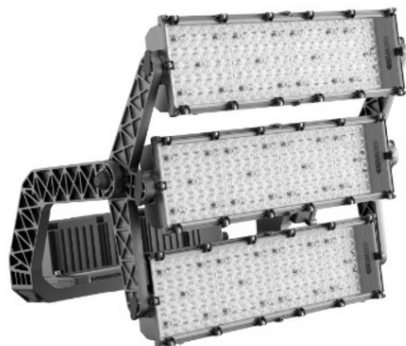

**GEWISS PROIECTOR STADIUM PRO - 3 MODULE - CIRCULAR OPTIC  
20° - CRI 90 5700K - IP66 - CLASS I**

GENERAL INFORMATION - -  
OPTIC AND ILLUMINATING FEATURES - -  
Context - Professional sport lighting  
Optic - Circular 20°  
Luminaire - High power LED floodlight  
Unified Glare Rating - ULOR = 0%  
Aplicatie - Intern / Extern  
Luminaria (lm) - 125000  
Unique digital code (Datamatrix) - Currently not present  
Efficiency  
(lm/W) - 86  
Culoare - Gri grafit  
Culoare Temperatur - 5700 K  
Tip sursa de luminaria - LED - Neinlocuibil  
Color Rendering Index - CRI>90 TLCI>80  
Puterea sistemului - 1450 W  
Standard Deviation Colour Matching - SDCM = 3  
LED Lifetime - L90B10(Tq25°C)=40.000h; L80B10(Tq25°C)=75.000h  
Photobiological Risk Class - -  
Greutate (Kg) - 32  
Standard - EN60598-1; EN60598-2-5; IEC 62471; IEC 62778  
Garanatie - 5 ani  
ELECTRICAL AND LIGHTING FEATURES - -  
Temperatur de stocare - -  
Tensiune de alimentare - See external supply unit  
Operating temperature - -25 +50 °C  
Frecventa nominala (Hz) - See external supply unit  
MATERIALS - -  
Driver - To be ordered separately  
Body - Aluminiu turnat  
Driver failure rate - See external supply unit  
Ecran - Flat tempered glass 4mm  
Overvoltage protection - See external supply unit  
Optic - T.I.R.Ex. Optical PMMA HT  
Control System - See external supply unit  
Gasket - Anti-aging silicone  
INSTALLATION AND MAINTENANCE - -  
Locking Hook - -  
Mounting and installation - Lighting tower - Surface  
External screw - Stainless steel  
Tilt - Rotation on bracket with integrated goniometer  
Colour - Polyester powder coated  
Wiring - Multipolar cable between floodlight and power supply  
STANDARDS AND APPROVALS - -  
Prindere - Consola  
Clasificare - -  
Optic Maintenance - Not available  
Dispozitiv cu temperatura la suprafata redus - -  
LED Maintenance - Da  
Certificare DIN 18032-3 - -  
Driver Box - Exterior  
IPEA - -  
Suprafata maxima expusa la vant - 0,36 m<sup>2</sup>  
Clasa izolatie - I  
- - -  
Clasa de protectie IP - IP66  
- - -  
Cod IK - IK08  
- - -  
Glow Test conductori - -  
- - -  
Ware number - 94054010  
Pret: 0,00 lei (TVA inclus)  
  
Detalii online: <https://www.materialelectrice.ro/proieCTOR-stadium-pro-3-module-circular-optic-200-cri-90-5700k-ip66-class-i-215712>