

Furnizor: **Sc Trivolt Distribution SRL**
Reg. com.: J23/3300/2016
CIF: RO36421140
Adresa: Strada Apusului nr 3 (primul
sens giratoriu Tehodor Pallady-
Autostrada Soarelui), Catelu, Ilfov
Banca: BRD
IBAN: RO34BRDE441SV13182234410



ATM LIGHTING CORP DE ILUMINAT PENTRU UZ INDUSTRIAL INS 340 LED 28,5W

Corp de iluminat LED cu elemente optice speciale pentru uz industrial, rezistent la apa si praf.

Materiale folosite:

Carcasa: otel inoxidabil sau otel galvanizat vopsit electrostatic

Dispersor: policarbonat stabilizat UV

Placa de montaj: foaie de otel galvanizat vopsit electrostatic

Caracteristici tehnice :

Putere LED: 28,5W

Flux luminos : 3319 lm

Eficienta luminoasa: 116 lm/W

Sursa de iluminat: LED

Clasa de protectie modul: I; IK10

Grad de protectie: IP66, IP67

CRI: >80;

Factor de putere: $\geq 0,95$

Durata de viata: > 50.000h L70B10

Temperatura de culoare: 4000K

Temperatura mediului ambiant: de la -25 ° C până la + 45 ° C

Montaj: pe tavan, pe perete sau suspendat

Tensiune de alimentare: 230V

Inlocuitor T8: 2x36W

Analiza comparativa:

INS 340 LED 28,5W - economie de 63% fata de inlocuitorul T8


INS 340 LED 28,5W - economie de 49% a retelei electrice

* Economie de consum energetic comparativ cu alti producatori de corpuri de iluminat T8 standard

** Economie de consum energetic comparativ cu alti producatori de corpuri de iluminat T8 standard presupunand un flux luminos egal al dispozitivelor comparate

Dimensiuni:


DIMENSIONS

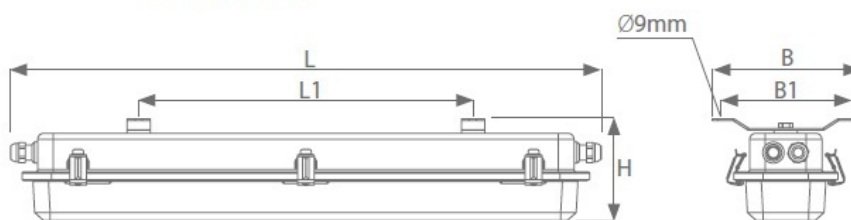

TYPE	L	L1	B	B1	H
INS340LED-0600	730	430	190	160	135
INS340LED-1200	1340	950	190	160	135

Distributie luminoasa:

PHOTOMETRY

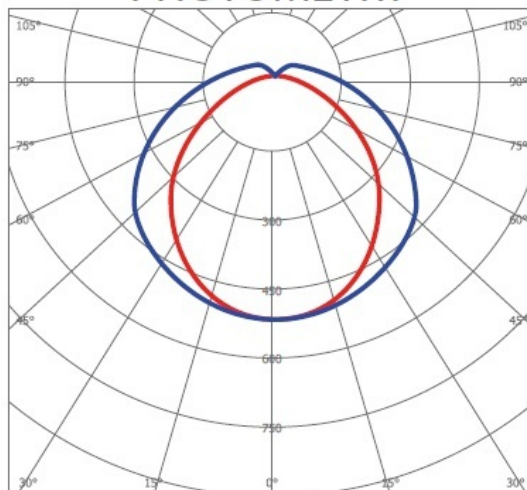

Pret: 1 844,50 lei (TVA inclus)

Detalii online: <https://www.materialeelectrice.ro/atm-lighting-ins-340-led-28-5w>