

Furnizor: **Sc Trivolt Distribution SRL**  
Reg. com.: J23/3300/2016  
CIF: RO36421140  
Adresa: Strada Apusului nr 3 ( primul  
sens giratoriu Tehodor Pallady-  
Autostrada Soarelui), Catelu, Ilfov  
Banca: BRD  
IBAN: RO34BRDE441SV13182234410

### **ATM LIGHTING CORP DE ILUMINAT PENTRU UZ INDUSTRIAL INS 340 LED 38,6W**

Corp de iluminat LED cu elemente optice speciale pentru uz industrial, rezistent la apa si praf.

Materiale folosite:

Carcasa: otel inoxidabil sau otel galvanizat vopsit electrostatic

Dispersor: policarbonat stabilizat UV

Placa de montaj: foaie de otel galvanizat vopsit electrostatic



Caracteristici tehnice :

Putere LED: 38,6W

Flux luminos : 4672 lm

Eficienta luminoasa: 121 lm/W

Sursa de iluminat: LED

Clasa de protectie modul: I; IK10

Grad de protectie: IP66, IP67

CRI: >80;

Factor de putere:  $\geq 0,95$

Durata de via: > 50.000h L70B10

Temperatura de culoare: 4000K

Temperatura mediului ambiant: de la -25 ° C până la + 45 ° C

Montaj: pe tavan, pe perete sau suspendat

Tensiune de alimentare: 230V

Inlocuitor T8: 2x36W

Analiza comparativa:

INS 340 LED 38,6W - economie de 51% fata de inlocuitorul T8


INS 340 LED 38,6W - economie de 51% a retelei electrice

\* Economie de consum energetic comparativ cu alti producatori de corpuri de iluminat T8 standard

\*\* Economie de consum energetic comparativ cu alti producatori de corpuri de iluminat T8 standard presupunand un flux luminos egal al dispozitivelor comparate

Dimensiuni:


#### DIMENSIONS

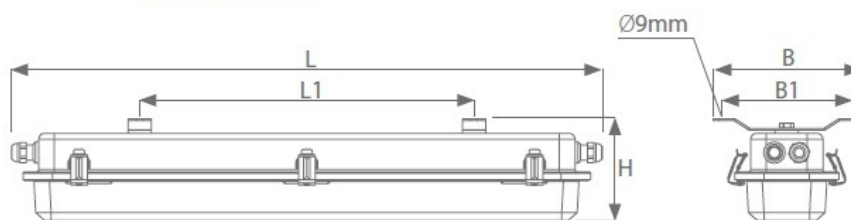

TYPE	L	L1	B	B1	H
INS340LED-0600	730	430	190	160	135
INS340LED-1200	1340	950	190	160	135

Distributie luminoasa:

#### PHOTOMETRY

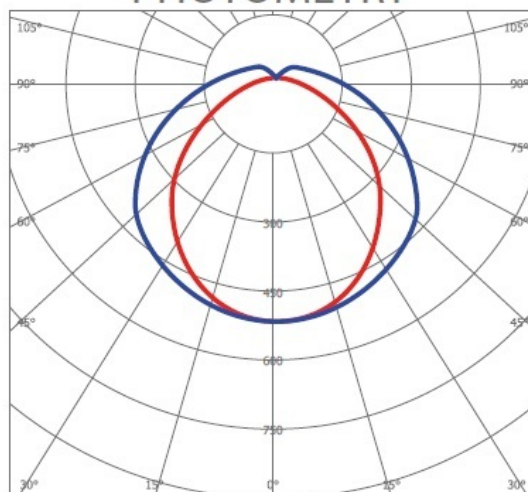

Pret: 2 611,76 lei (TVA inclus)

Detalii online: <https://www.materialeelectrice.ro/atm-lighting-ins-340-led-38-6w>