

Furnizor: **Sc Trivolt Distribution SRL**  
Reg. com.: J23/3300/2016  
CIF: RO36421140  
Adresa: Strada Apusului nr 3 ( primul  
sens giratoriu Tehodor Pallady-  
Autostrada Soarelui), Catelu, Ilfov  
Banca: BRD  
IBAN: RO34BRDE441SV13182234410



### **ATM LIGHTING CORP ILUMINAT PENTRU INDUSTRIA ALIMENTARA INS 360 LED 20,5W**


Corp de iluminat LED specific pentru industria alimentara, rezistent la apa si praf cu dispersor realizat din sticla securizata ce previne imprastierea cioburilor in procesul de productie in caz de avarie. Aprobata de catre Institutul Polonez de Alimentatie (PZH) ce indeplineste standardele internationale ale industriei alimentare (IFS).

Materiale folosite:  
Carcasa: otel inoxidabil presat  
Dispersor: sticla securizata  
Placa de montaj: otel galvanizat  
Cleme: otel inoxidabil

Caracteristici tehnice :  
Putere LED: 21,5W  
Flux luminos : 2346 lm  
Eficienta luminoasa: 109 lm/W  
Sursa de iluminat: LED  
Clasa de protectie modul: I  
Grad de protectie: IP65  
CRI: >80  
Factor de putere:  $\geq 0,95$   
Durata de viaa: > 50.000h L70B10  
Temperatura de culoare: 4000K  
Temperatura mediului ambiant: de la -25 °C până la +45°C  
Montaj: pe tavan sau pe perete  
Tensiune de alimentare: 230V  
Inlocuitor T8: 2x18W


Analiza comparativa:  
INS 360 LED 21,5W - economie de 43% fata de inlocuitorul T8\*  
INS 360 LED 21,5W - economie de 51% a retelei electrice\*\*  
\* Economie de consum energetic comparativ cu alti producatori de corpuri de iluminat T8 standard  
\*\* Economie de consum energetic comparativ cu alti producatori de corpuri de iluminat T8 standard presupunand un flux luminos egal al dispozitivelor comparate

Dimensiuni:

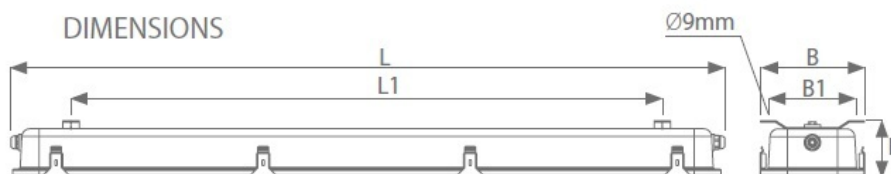

TYPE	L	L1	B	B1	H
INS360LED-0600	710	560	190	160	99
INS360LED-1200	1310	1100	190	160	99

Distributie luminoasa:

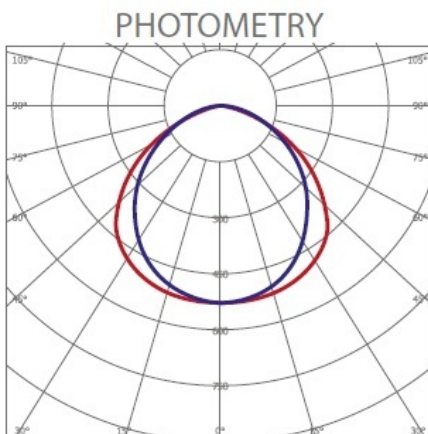

Pret: 2 916,75 lei (TVA inclus)

