

Furnizor: **Sc Trivolt Distribution SRL**
Reg. com.: J23/3300/2016
CIF: RO36421140
Adresa: Strada Apusului nr 3 (primul
sens giratoriu Tehodor Pallady-
Autostrada Soarelui), Catelu, Ilfov
Banca: BRD
IBAN: RO34BRDE441SV13182234410



ATM LIGHTING CORP ILUMINAT PENTRU INDUSTRIA ALIMENTARA INS 360 LED 55,5W


Corp de iluminat LED specific pentru industria alimentara, rezistent la apa si praf cu dispersor realizat din sticla securizata ce previne imprastierea cioburilor in procesul de productie in caz de avarie. Aprobata de catre Institutul Polonez de Alimentatie (PZH) ce indeplineste standardele internationale ale industriei alimentare (IFS).

Materiale folosite:
Carcasa: otel inoxidabil presat
Dispersor: sticla securizata
Placa de montaj: otel galvanizat
Cleme: otel inoxidabil

Caracteristici tehnice :
Putere LED: 55,5w
Flux luminos : 5200 lm
Eficienta luminoasa: 94 lm/W
Sursa de iluminat: LED
Clasa de protectie modul: I
Grad de protectie: IP65
CRI: >80
Factor de putere: $\geq 0,95$
Durata de viata: > 50.000h L70B10
Temperatura de culoare: 4000K
Temperatura mediului ambiant: de la -25 °C până la +40°C
Montaj: pe tavan sau pe perete
Tensiune de alimentare: 230V
Inlocuitor T8: 2x36W


Analiza comparativa:
INS 360 LED 21,5W - economie de 57% fata de inlocuitorul T8*
INS 360 LED 21,5W - economie de 42% a retelei electrice**
* Economie de consum energetic comparativ cu alti producatori de corpuri de iluminat T8 standard
** Economie de consum energetic comparativ cu alti producatori de corpuri de iluminat T8 standard presupunand un flux luminos egal al dispozitivelor comparate

Dimensiuni:

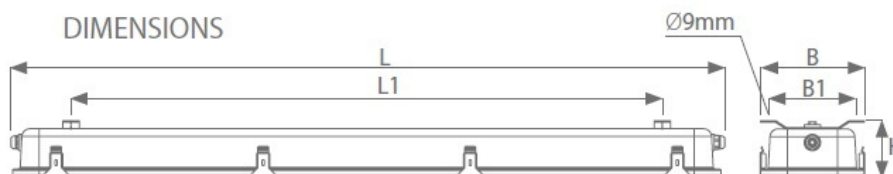

TYPE	L	L1	B	B1	H
INS360LED-0600	710	560	190	160	99
INS360LED-1200	1310	1100	190	160	99

Distributie luminoasa:

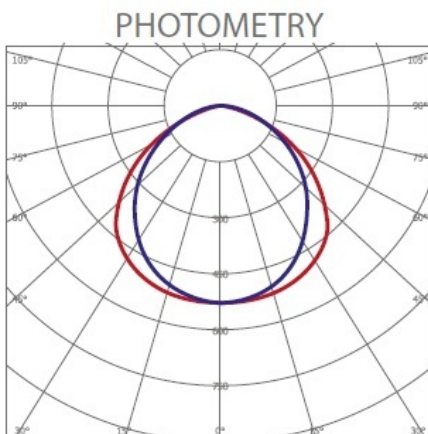

Pret: 4 486,52 lei (TVA inclus)

