


Furnizor: **Sc Trivolt Distribution SRL**
Reg. com.: J23/3300/2016
CIF: RO36421140
Adresa: Strada Apusului nr 3 (primul
sens giratoriu Tehodor Pallady-
Autostrada Soarelui), Catelu, Ilfov
Banca: BRD
IBAN: RO34BRDE441SV13182234410

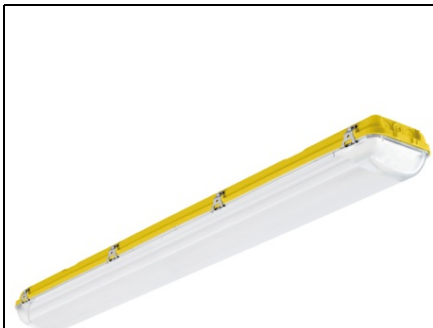

ZALUX LAMPA ETANSA PENTRU MEDII EX IP118ACQUEX LED-M 1500 ET EB3 PC INOX

Simply, safe and reliable for explosive atmospheres in Zone 2, 22
Safe installation thanks to its internal diffuser which avoids direct contact with the LED module.

Outstanding impact resistance IK10.

Up to 150lm/W with DALI and emergency kit versions to cover more needs with a single luminaire

Quick, easy and safe mounting on ceiling on wall.

Downloads

Zone 2, 22

Ex II 3G nA IIC T6 Gc

Ex II 3D Ex tc IIIC T85 Dc IP66

Features

Mechanical

Housing Compressed fibreglass reinforced polyester (GRP), yellow RAL 1003

Diffuser Injected polycarbonate with UV protection, transparent finish

Gasket Polyurethane

Cable entry ATEX cable gland

Closing clips Stainless steel

Fixing clips Stainless steel

Operational Data

Light colour 4,000 K

CRI >80

Luminous flux 5,800 lm

Power 40 W

Efficiency 145 lm/W

Emergency kit 3 hours autonomy

Functional

Lifetime L80 70,000 h at 25°C

Fire protection GRP and PC / Flammability (UL94): HB

Glow wire test (EN 60695-2-11): 650°C

Electrical

Driver non dimmable

Connection 5 pole push wire terminal block

Flicker factor < 1%

Power factor > 0.95 full load

Photometrical

Dimensions

Length (X) 1,578 mm

Distance between springs (Xm) 1,100 mm

Width (Y) 145 mm

Height (Z) 101 mm

Weight 4.2 kg

<span class="elementor-button-text"

Pret: 0,00 lei (TVA inclus)

Detalii online: <https://www.materialeelectrice.ro/lampa-etansa-pentru-medii-ex-ip118acquex-led-m-1500-et-eb3-pc-inox-287491>