


Furnizor: **Sc Trivolt Distribution SRL**  
Reg. com.: J23/3300/2016  
CIF: RO36421140  
Adresa: Strada Apusului nr 3 ( primul  
sens giratoriu Tehodor Pallady-  
Autostrada Soarelui), Catelu, Ilfov  
Banca: BRD  
IBAN: RO34BRDE441SV13182234410

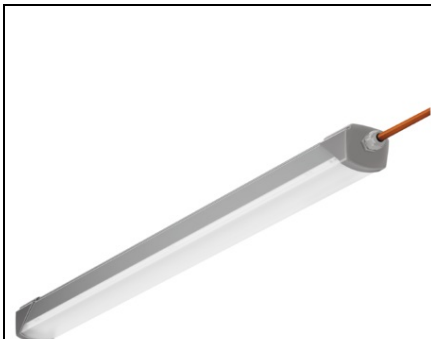

### **ZALUX LAMPA LINIARA ETANSA CU FIXARE RAPIDA BHE 69K 1.2 40-840 ET BPM 3M 3X1.5**

Gas-tight, long-lasting, compact and resistant luminaire with easy installation  
Single-part IP66 / IP69K extruded PMMA profile, up to 138lm/W and flicker free.  
Gas tight: hermetically sealed against liquid and gas income.  
PWIS-free to guarantee a perfect finish in paint shops and coating areas.  
Quick and safe mounting with no tools needed.  
Extraordinary chemical resistance.

#### Downloads

#### Features

#### Mechanical

Profile Extruded PMMA with UV protection, upper part grey RAL 7035, bottom part opal

End caps Acrylonitrile styrene acrylate (ASA)

Gasket PWISS-free silicone

Cable entry Cable gland with external cable

Fixing clips Stainless steel

#### Operational Data

Light colour 4,000 K

CRI >80

Luminous flux 4,000 lm

Power 29 W

Efficiency 135 lm/W

Through wiring 3 x 1.5 mm<sup>2</sup>

#### Functional

Lifetime L80 70,000 Custom.U1 at 25°C

Fire protection GRP and PMMA / Flammability (UL94): HB

Glow wire test (EN 60695-2-11): 650°C

#### Electrical

Driver non dimmable

Connection External cable 3m

Flicker factor < 1%

Power factor > 0.95 full load

#### Photometrical

Colour consistency < 3 SDCM

#### Dimensions

Length (X) 1,200 mm

Distance between springs (Xm) 800 mm

Width (Y) 76 mm

Height (Z) 67 mm

Weight 2.4 kg

<span class="elementor-button-text"

Pret: 0,00 lei (TVA inclus)

Detalii online: <https://www.materialelectrice.ro/lampa-liniara-etansa-cu-fixare-rapida-bhe-69k-1-2-40-840-et-bpm-3m-3x1-5-287554>