


Furnizor: **Sc Trivolt Distribution SRL**  
Reg. com.: J23/3300/2016  
CIF: RO36421140  
Adresa: Strada Apusului nr 3 ( primul  
sens giratoriu Tehodor Pallady-  
Autostrada Soarelui), Catelu, Ilfov  
Banca: BRD  
IBAN: RO34BRDE441SV13182234410

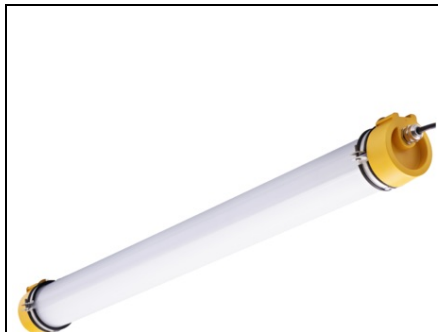

**ZALUX LAMPA ATEX PENTRU MEDII HIPERCLORURATE SI Å®N AER  
LIBER IK14STRONGEX2 1200 B 62-840 ETDD CS CG HFS**

Extreme robustness and resistance against impacts and chemical agents  
High performance LED module and driver, with high resistance to high temperatures up to 55°C.

Specific gas tight potting to avoid the ingress and condensation of gases.  
Resistant to acids, sulphur vapours and salty environments.

Suitable for outdoor without limitations.

Downloads

Zone 2, 22

Ex II 3G Ex ec IIC T5/T6 Gc

Ex II 3D Ex tc IIIC T85...T100 Dc

ATEX certificate No: OBAC 20 ATEX 0334X

Features

Mechanical

Profile High impacts resistant PMMA

End caps PA66 + fibreglass

Gasket Polyurethane

Cable entry ATEX cable gland

Fixing clips Specific stainless steel fixing brackets

Operational Data

Light colour 4,000 K

CRI >80

Luminous flux 6,200 lm

Power 42 W

Efficiency 150 lm/W

Sensor High frequency sensor

Functional

Lifetime L80 100,000 h at 35°C

Fire protection PMMA / Flammability (UL94): V2

Glow wire test (EN 60695-2-11): 650°C

Electrical

Driver DALI Casambi dimmable

Connection External cable 1m

Power factor > 0.95 full load

Photometrical

Colour consistency < 3 SDCM

Dimensions

Length (X) 1,345 mm

Distance between springs (Xm) 1,205 mm

Width (Y) 127 mm

Height (Z) 113 mm

Weight 4.8 kg

<span class="elementor-button-text"

Pret: 0,00 lei (TVA inclus)

Detalii online: <https://www.materialelectrice.ro/lampa-atex-pentru-medii-hiperclorurate-si-in-aer-liber-ik14strongex2-1200-b-62-840-etdd-cs-cg-hfs-287808>